


TELEX TECHNICAL DATA

Audiocom®

SPK-2000 Powered Loudspeaker

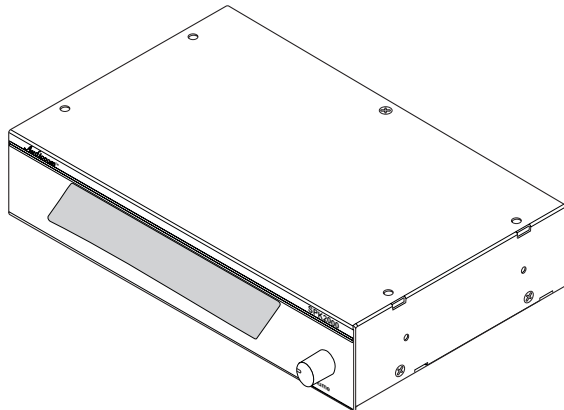

General Description

The SPK-2000 is a powered loudspeaker accessory for the US2000A User Station and the ES4000A Expansion Station. It may be used on a desktop, or rack mounted with optional Audiocom rack mount hardware. (Unit is supplied with rubber feet for desktop use.)


The SPK-2000 comes with a 3 ft (.9 m) cord for connection to the US2000A or ES4000A speaker jack.

Features

- ☐ Powerful speaker output for public address or stage announce.
- ☐ Rack-mountable with optional Audiocom rack mount hardware. Occupies 1/2-wide rack space.
- ☐ Two line-level speaker inputs, with balance control to adjust the mix. Combine two channels of intercom audio. Or, connect the monaural mix output from an Audiocom User Station, then connect a local program audio source, such as background music.
- ☐ Master volume control on front panel.
- ☐ Works with same power pack as US2000A and ES4000A.

Specifications

Power Requirements: 12 to 15 VDC, 65 to 150 mA (works with PS-L power supply)
Frequency Response: 400 Hz to 8 kHz, ± 3 dB
Input Impedance: 47K ohms, minimum
Input Level: 1 VRMS, nominal
Output Amplifier Power: 4.4 W maximum; 2 W continuous
Signal-to-Noise (ref 2W into 8 ohms): 75 dB
THD: Less than 0.5% at 2W
Balance Control: 12 dB maximum relative attenuation
Dimensions: 1.75" (44.5 mm) high x 8.25" (209.6 mm) wide x 5.25" (133.4 mm) deep
Environmental: 0°C to 50°C; 0% to 95% humidity, non-condensing

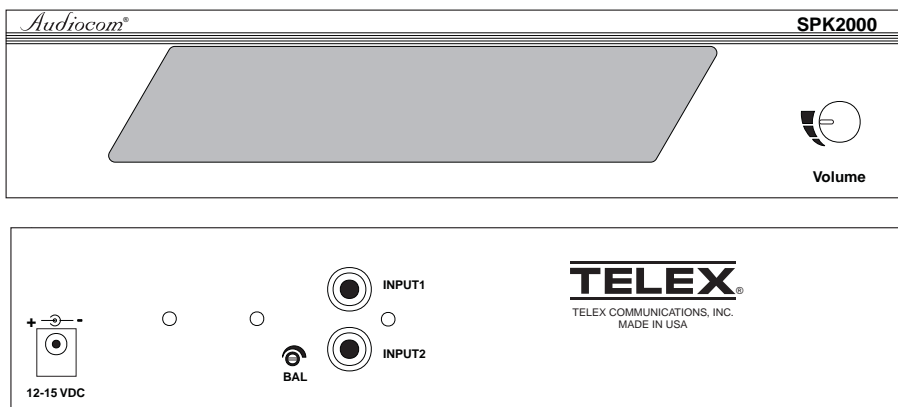

Telex Communications, Inc. 9600 Aldrich Ave. South, Minneapolis, MN 55420 Tel: 612-884-4051 Fax: 612-884-0043

Email: pro.sound@telex.com Home Page <http://www.telex.com>

© Telex Communications, Inc. 1998

9350-7629-000 Rev A, 6/98

TELEX®