



TECHNICAL DATA SHEET



DESCRIPTION

The MCP-90 series microphones are phantom-powered “back-electret” miniature condenser gooseneck microphones. The back-electret feature provides greater sensitivity, wider frequency response, and superior immunity from handling noise than a diaphragm-electret microphone. The MCP-90 microphones are mechanically designed for quick, easy mounting to RTS™ keypanels and selected Audiocom® intercoms. The frequency response is tailored for full-range sound reproduction with natural sound pick-up optimized for close-up use. The microphones are fitted with a threaded TRS male connector that is compatible with RTS™ standard threaded TRS female connectors. The MCP-90 series is designed to be phantom powered with a wide voltage range of 1.5 to 9 VDC.

INSTALLATION

Insert the TRS end of the microphone into the threaded TRS connector as far as it will go. When the threads are reached, begin turning the microphone (as a unit) in a clockwise manner until the microphone is completely screwed into the unit.

MCP-90-3

MCP-90-8

MCP-90-12

MCP-90-18

ARCHITECTURAL & ENGINEERING SPECIFICATIONS

The microphone shall be a single-D cardioid back-electret condenser type with frequency response of 100 to 15,000 Hz.

The microphone shall have an output impedance compatible with RTS™ equipment. The output level shall be -47 dB (0 dB= 1mW/pascal). The microphone shall have a back-electret generating element whose output shall not be appreciably affected by temperature extremes from -17.8°C (0°F) to 54.4°C (130°F) and/or humidity extremes. The microphone shall be fitted with a threaded TRS male type connector that is compatible with RTS™ keypanels.

The RTS™ MCP-90 is specified

PLEASE CONTACT US

Telex Communications, Inc.
12000 Portland Avenue South
Burnsville, MN 55337 U.S.A.

Tel: (952) 884-4051
Fax: (952) 884-0043

SPECIFICATIONS

Generation Element:

Dual condenser, back-electret

Frequency Response:

100 Hz to 15,000 Hz

Polar Patterns:

Cardioid

Sensitivity:

Open Circuit Voltage:

4.5mV (-47 dB)/pascal @ 1 kHz

Power Level, 1 kHz (0 dB= 1 mW/pascal):

-44 dB

Dynamic Range:

102 dB

Output Impedance:

Compatible with RTS™ keypanels

Power Requirements:

1.5 to 9 VDC phantom supply

Current Consumption:

<500 μ A

Color:

Nonreflecting black

Environmental Conditions, Relative

Humidity 0-50%:

-29° to 74°C (-20° to 165°F)

Relative Humidity 0 to 95%:

-29° to 57°C (-20° to 135°F)

Mounting:

Male threaded TRS

Dimensions

Gooseneck to Head Length:

MCP-90-3: 76.2mm (3")

MCP-90-8: 203.2mm (8")

MCP-90-12: 304.8mm (12")

MCP-90-18: 457.2mm (18")

Maximum Head Diameter:

14 mm (0.55 in.)

Gooseneck Diameter:

6.4 mm (0.25 in.)


Electronics Module Diameter:

20 mm (0.79 in.)


Accessories Furnished:

Windscreen

RESPONSE

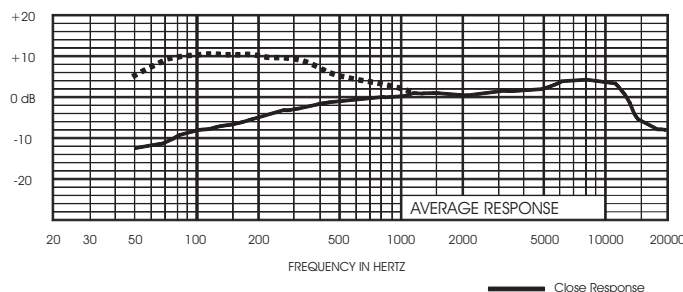

Frequency Response

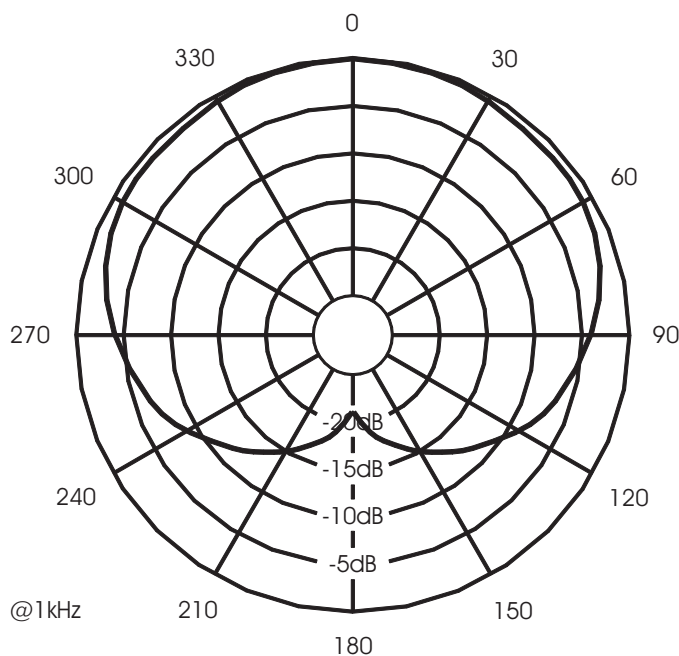

Polar Response

WARRANTY

Products are warranted by Telex Communications, Inc. to be free from defects in materials and workmanship for a period of three years from the date of sale.

The sole obligation of Telex during the warranty period is to provide, without charge, parts and labor necessary to remedy covered defects appearing in products returned prepaid to Telex. This warranty does not cover any defect, malfunction or failure caused beyond the control of Telex, including unreasonable or negligent operation, abuse, accident, failure to follow instructions in the manual, defective or improper associated equipment, attempts at modification and repair not authorized by Telex, and shipping damage. Products with their serial numbers removed or effaced are not covered by this warranty.

To obtain warranty service, follow the procedures entitled "Procedure for Returns" and "Shipping to Manufacturer for Repair or Adjustment".

This warranty is the sole and exclusive express warranty given with respect to RTS products. It is the responsibility of the user to determine before purchase that this product is suitable for the user's intended purpose.

ANY AND ALL IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY ARE LIMITED TO THE DURATION OF THIS EXPRESS LIMITED WARRANTY.

NEITHER TELEX NOR THE DEALER WHO SELLS TELEX PRODUCTS IS LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND.