


VistaLINK™ General Purpose (GPI I/O) Interface Module

Model 7700GPI

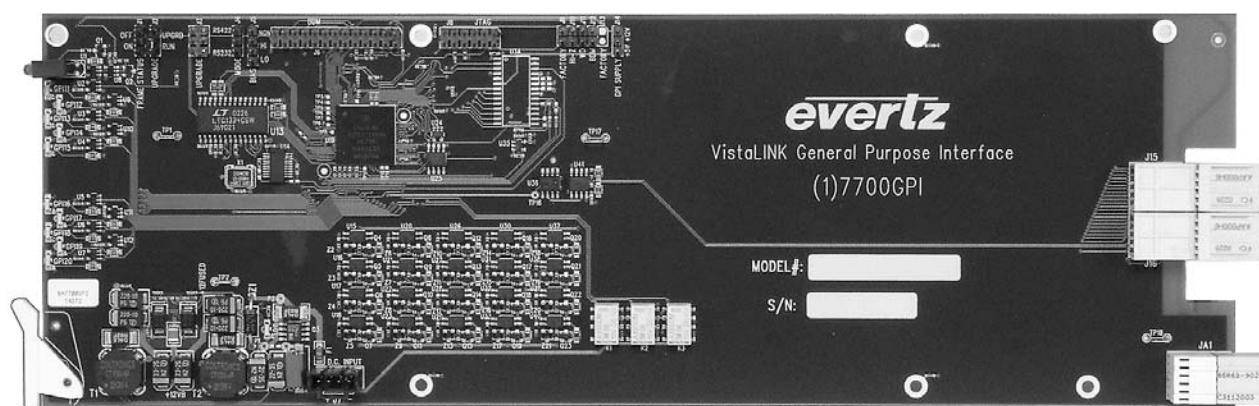

The 7700GPI VistaLINK™ General Purpose Interface module links third-party equipment and Evertz's VistaLINK™ Network Management System (NMS). Third-party equipment with fault alarming capabilities through General Purpose Interface outputs (GPO) can communicate fault alarm conditions to the VistaLINK™ application software through this GPO to SNMP translator thereby extending fault monitoring capabilities across the broadcast network.

Equipped with a Linear Time Code (LTC) input, the 7700GPI module can synchronize logged fault alarms within the VistaLINK™ application software with the facility clock for accurate alarm acknowledgement and record-keeping.

VistaLINK™ offers remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP) giving the flexibility to manage operations, including signal monitoring and module configuration from SNMP-enabled control systems (Manager or NMS).

Features

- 20 opto-isolated General Purpose Interface inputs (GPI)
- Enabled GPI inputs/alerts translated and reported to Network Management System (NMS) user interface via SNMP
- Selectable +5V or +12V supply for driving GPI over longer cable runs
- 3 relay closure General Purpose Interface outputs (GPO)
- GPI/GPO easily accessed through pin-headers (2x6 Phoenix Terminal Blocks) on rear plate
- 1 LTC input for module synchronization of fault alarms to facility time
- Modular, conveniently fitting into 7700FR-C 3RU frame
- Module status LED and 20 GPI LEDs for simple GPI input diagnostics
- Frame status trigger
- Jumper-configurable RS-232/RS-422 input serial COM port
- Optional air temperature probe for reporting frame temperature status
- VistaLINK™-enabled offering remote monitoring, control and configuration capabilities via SNMP. VistaLINK™ is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK™ Frame Controller module in slot 1 of the frame

