


ARRI LIGHTING GRIP CATALOGUE

2013

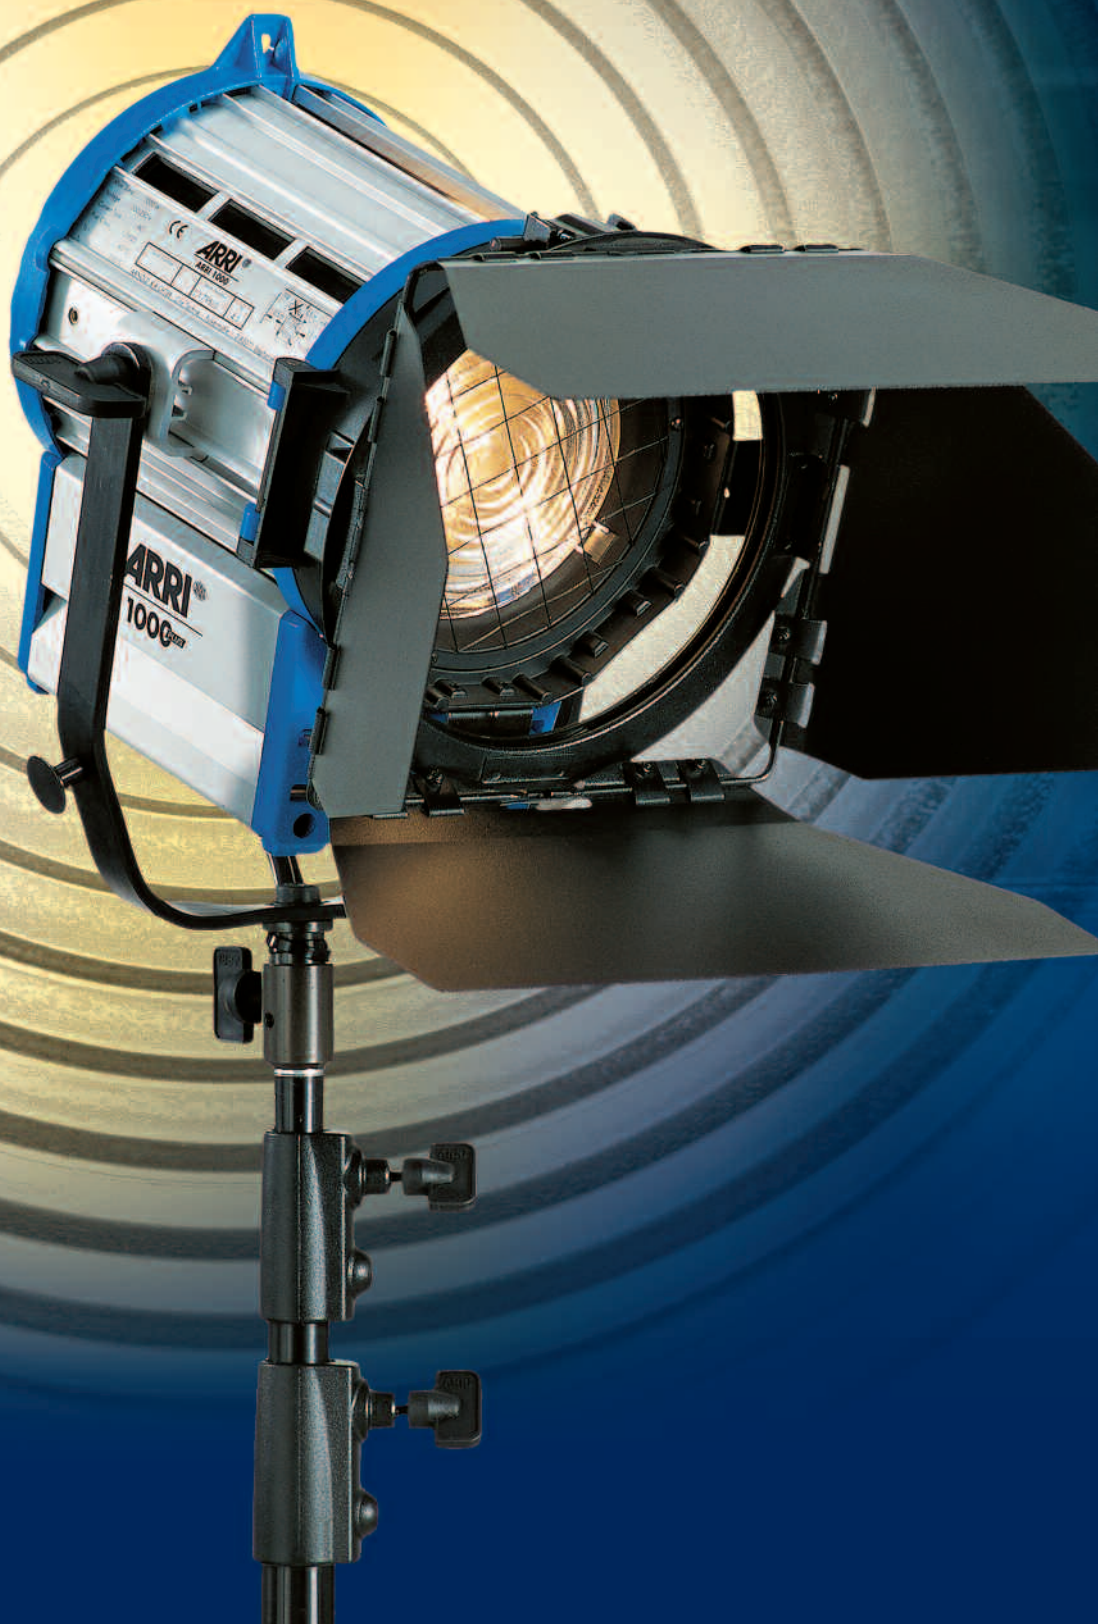

welcome

ARRI Grip is a comprehensive range of lighting stands and mounting equipment of the highest quality for film, TV and location applications.

Innovative design combined with the latest production technology ensure the quality of these products and makes them worthy of the ARRI name. We listen to you, the practitioners, and adjust the designs accordingly. Recent innovations include time-saving quick-action clamps and folding frames that can be transported without removing the fabric then set up in seconds.



















The products embody practicality and professionalism at all levels, from the captive lock-offs that can't get lost, to the high efficiency brake shoe systems that operate whatever the weather. Precision manufacturing ensures that spares will fit and that parts can be interchanged between stands. Stainless, rust-proofed or aluminium tubes and castings are used throughout.

With the highest regard for safety, all equipment is designed to meet international regulations such as DIN 15560, TUV, CE and ISO.

With a range developed and expanded over more than 30 years, whatever your requirements,

ARRI Grip has the perfect answer.

GUIDE TO SYMBOLS

	Minimum Height
	Maximum Height
	Closed Length
	Footprint Diameter
	Weight
	Maximum Evenly Distributed Load on Level Ground
	Maximum Load on Fully Extended Stand at 6° Inclination
	Spigot Size ^H
	Socket Size ^H
	Grip Head Size
	Top Tube Diameter
	Suggested Wheels
	Gravity Cast
	Black Option
	Air Cushioned Option
	Black Chrome Option
	17mm Stand Female Attachment Option
	German Safety Standard

^H NOTE: in product specifications you will often see a note referring to the spigot/socket type of the product (e.g. "type 14"). This type number refers to the spigot and socket variants shown in Section 9.

Ordering

Products may be ordered by using the product code together with its title.

Optional Black (**B**) finish, Air Cushioned (**AC**), Black Chrome (**CB**) finish and 17mm female attachment (**J**) versions are available where indicated.

Add **B**, **AC**, **CB** or **J** to the product code when ordering.

In order to maintain the highest standards, ARRI reserves the right to alter specifications without notice.



For stands with maximum load over 3kg, this brochure specifies, in accordance with DIN 15560 norm, the load when the stand is fully extended at an inclination of 6° from vertical.

DIN 15560 specifies the maximum load on a 'non-windup' stand is 18kg.

Optional wheels invalidate the height and load specifications according to DIN 15560.



Stands **Baby Lightweight Stands**

Hardworking versatile lightweights for kits, locations and in the studio!

MAX payload 1-10kg

- Quick to set up and very stable.
- Column extension collars are pressure die cast aluminium.
- Double braced leg base for extra stability and safety.
- Choose between silver or black anodised aluminium finish or steel.
- Air cushioned feature as indicated (AC).
- Ideal for lighter weight film & video fixtures.
- They fold quickly to a compact size, fitting into most lighting kits.

1012B

BACKLITE STAND

📏 9cm
📏 85cm
📏 48cm
📏 60cm
📏 1.32kg
📏 3kg
📏 Base type 1+ Spigot LS.013
📏 Pole type 18 + type 19

detachable black aluminium column.
2 sections, 1 riser. Ø: 22, 19mm.
Solid flat legs: 20 x 5mm.
A versatile stand allowing fixtures to mount on the ground or on the included pole for extra height.

1052BAC

BLACK ALU COMPACT STAND

📏 101cm
📏 237cm
📏 86cm
📏 109cm
📏 1.28kg
📏 5kg
📏 2.2kg@237cm
📏 Type 19
📏 017

Aluminium stand.
3 sections, 2 risers.
Ø: 25, 22, 19mm.
Leg Ø: 19mm.

5001B

NANO STAND

📏 49cm
📏 190cm
📏 48cm
📏 100cm
📏 0.93kg
📏 1.5kg
📏 Type 19

Black aluminium stand.
5 sections, 4 risers.
Ø: 25, 22, 19, 16, 13mm. Solid flat legs 15 x 5mm.
An ideal stand for kits due to its compact design.

156BLB

BLACK ALU LOW MINI PRO

📏 40cm
📏 123cm
📏 40cm
📏 45cm
📏 0.62 kg
📏 1.5kg
📏 Type 19 + 015adap

Aluminium stand.

1005BAC

BLACK ALU RANKER STAND

📏 118cm
📏 273cm
📏 100cm
📏 106cm
📏 2 kg
📏 10kg
📏 Type 25 + spigot 013
📏 018

Aluminium stand.

1051BAC

BLACK MINI COMPACT STAND AC

📏 75cm
📏 211cm
📏 67cm
📏 70cm
📏 1 kg
📏 4kg
📏 Type 19 + 015ad
📏 017

Aluminium stand.

1122B

ALUMINIUM STAND

📏 118cm
📏 273cm
📏 100cm
📏 106cm
📏 2 kg
📏 10kg
📏 Type 25 + spigot 013
📏 018

Aluminium stand.

Baby Lightweight Stands

MAX payload 1-10kg

- Take a step up to the medium strength stands featuring robust design with heights from 91cm to 413cm.
- These stands are all constructed of steel allowing for heavier payloads plus greater durability. Most of the parts are field serviceable allowing less down-time.

1004BAC

BLACK ALU MASTER STAND

📏 124cm
📏 366cm
📏 107cm
📏 106cm
📏 2.15kg
📏 9kg
📏 1.8kg@330cm
📏 Type 19+015adap
📏 018



Black aluminium stand. 4 sections, 3 risers.
Ø: 35, 30, 25, 20mm. Leg Ø: 22mm.

A0035B

ALU BABY STAND 35

AC

📏 126cm
📏 350cm
📏 112cm
📏 100cm
📏 3.5kg
📏 9kg
📏 16mm
📏 A9000



Šaržir * A*

Aluminium stand.
4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg Ø: 20mm.

A0040B

ALU BABY STAND 40

RISER C/W LAZY LEG - BLACK

📏 142cm
📏 400cm
📏 124cm
📏 114cm
📏 4kg
📏 9kg
📏 8kg@268cm
📏 16mm



Black aluminium stand.
4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg: 20 x 20mm.
1 levelling leg.

A0045B

ALU BABY STAND 45

📏 F1 &
📏 450cm
📏 136cm
📏 114cm
📏 4kg
📏 10kg
📏 16mm



Black aluminium stand.
4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg: 20 x 20mm.
1 levelling leg.

A0030B

ALU BABY STAND 30

TRIPLE RISER

📏 113cm
📏 300cm
📏 100cm
📏 100cm
📏 3.5kg
📏 10kg
📏 2kg@413cm
📏 16mm



Black aluminium stand.
4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg: 20 x 20mm.
1 levelling leg.

L2.88636.0 / LS.003M

MINI BACKLITE BASE

MALE ATTACHMENT

📏 9.7cm
📏 40cm
📏 0.52kg
📏 10kg
📏 Type 33



The hole at the end of each leg enables the user to nail the stand to the floor, hang it on a wall or fix it to the ceiling.

003

BACKLITE BASE

FEMALE ATTACHEMENT

📏 9cm
📏 60cm
📏 1kg
📏 15kg
📏 Type 1+Spigot LS.013



Fold away base with 16mm female attachment and spigot.

Stands **Baby Lightweight Stands**

Hardworking versatile lightweights for kits, locations and in the studio!

MAX payload 11-25kg

- These stands are all constructed of steel allowing for heavier payloads plus greater durability. Most of the parts are field serviceable allowing less down-time.

A0030CS

STEEL BABY ST AND 30

113cm

300cm

100cm

100cm

6kg

10kg

16mm

Chrome steel stand.
3 sections, 2 risers.
Ø: 35, 30, 25mm.
Leg: 20 x 20mm.
1 Levelling leg.

A0010

BABY STAND 10

52cm

100cm

47cm

43cm

2.5kg

15kg

16mm

Chrome steel stand.
3 sections, 2 risers.
Ø: 35, 30, 25mm.
Leg: 20 x 20mm.
1 levelling leg.

A0040CS

STEEL BABY STAND 40

142cm

400cm

124cm

114cm

7.5kg

9kg

16mm

Chrome steel stand.
3 sections, 2 risers.
Ø: 35, 30, 25mm.
Leg: 20 x 20mm.
FAS^Ç^||ā * Å^*

A0045CS

STEEL BABY STAND 45

154cm

450cm

136cm

114cm

8kg

25kg

16mm

Chrome steel stand. 4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg: 20 x 20mm. 1 levelling leg.

A0035CS

STEEL BABY STAND 35

126cm

350cm

112cm

100cm

7kg

9kg

16mm

Chrome steel stand. 4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg: 20 x 20mm. 1 levelling leg.

Stands Junior Universal Stands

Professional heavy duty stands for location or studio.

MAX payload 10-15kg

- The workhorse of the industry for trouble free service on location and in the studio.
- Equally suitable for supporting reflectors or luminaires.
- Universal head type 14 with 28mm sockets plus either 16mm socket or "pop-up" 16mm stud.
- Stands for loads from 10kg to 40kg.
- All have levelling leg.
- Optional braked wheels.
- Chrome steel, black zinc and silver or black aluminium versions.
- Double braced leg base for extra stability and safety.
- Optional air cushioning as indicated (AC).

008BU

BLACK ALU CINE STAND

📏 131cm
📏 212cm
📏 112cm
📏 118cm
📏 4.2kg
📏 15kg
📏 3.6kg@212cm
📏 Type 14
📏 109, 110, 110G

Black aluminium stand.
2 sections, 1 risers.
Ø 35, 30mm.
Leg Ø: 22mm.
1 levelling leg.

007BU

BLACK ALU SENIOR STAND

📏 124cm	📏 12kg
📏 315cm	📏 3.6kg@315cm
📏 122cm	📏 Type 14
📏 118cm	📏 109, 110,
📏 3kg	110G


Aluminium stand.
3 sections, 2 risers.
Ø 35, 30, 25mm.
Leg Ø: 22mm.
1 levelling leg.

269HDBU

HIGH SUPER ALU STAND

📏 190cm
📏 730cm
📏 173cm
📏 174cm
📏 10kg
📏 10kg
📏 1kg@730cm
📏 Type 14
📏 103, 104, 104G

Black aluminium stand.
6 sections, 5 risers.
Ø: 50, 45, 40, 35, 30, 25mm.
Leg Ø: 30mm.
1 levelling leg.

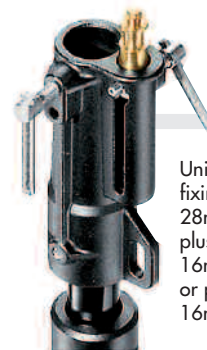

Universal top fixing type 14:
28mm socket
plus either
16mm socket
or pop – up
16mm stud.

MAX payload 16-30kg

007CSU

SENIOR STAND

-  124cm
-  325cm
-  122cm
-  118cm
-  7.3kg
-  20kg
-  6.7kg@325cm
-  Type 14
-  109, 110, 110G

Chrome plated steel stand.
3 sections, 2 risers.
Ø: 35, 30, 25mm.
Leg Ø: 22mm.
1 levelling leg.

111CSU

TALL STAND

-  146cm
-  380cm
-  155cm
-  102cm
-  9kg
-  25kg
-  6kg@380cm
-  Type 14
-  103, 104, 104G

Chrome plated steel stand.
3 section, 2 risers. Ø: 35, 30, 25mm.
Leg Ø: 22mm. 1 levelling leg.
The small footprint makes this stand perfect for tight spaces.

007BSU

BLACK STEEL SENIOR STAND

-  124cm
-  325cm
-  122cm
-  118cm
-  7.3kg
-  20kg
-  6.7kg@325cm
-  Type 14
-  109, 110, 110G

Black steel stand.
3 sections, 2 riser.
Ø: 35, 30 ; 25mm.
Leg Ø: 22mm. 1 levelling leg.

008CSU

CHROME STEEL CINE STAND

-  132cm
-  216cm
-  116cm
-  118cm
-  6.4kg
-  30kg
-  18kg@216cm
-  Type 14
-  110, 110G

Chrome steel stand.
2 sections, 1 riser.
Ø: 35, 30mm.
Leg Ø: 22mm. 1 levelling leg.

111BSU

not illustrated

STAINLESS STEEL CINE STAND

-  146cm
-  380cm
-  156cm
-  102cm
-  9kg
-  25kg
-  6kg@380cm
-  Type 14
-  103, 104, 104G

Black chrome plated steel stand.
3 sections, 2 riser.
Ø: 35, 30, 25mm.
Leg Ø: 22mm. 1 levelling leg.

Stands Junior Universal Stands

Professional heavy duty stands for location or studio.


MAX payload 35-40kg

269BU

BLACK SUPER ALU STAND

-  144cm
-  455cm
-  144cm
-  174cm
-  8kg
-  35kg
-  6.3kg@455cm
-  Type 14
-  103, 104, 104G

Black aluminium stand. 4 sections, 3 risers. Ø: 50, 45, 40, 35mm. Leg Ø: 30mm. 1 levelling leg.

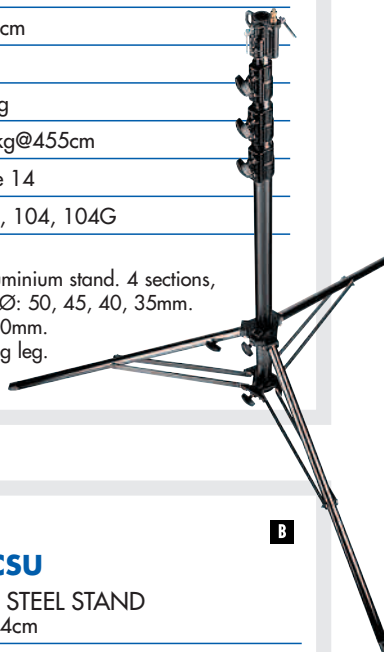


126CSU

UNIVERSAL STEEL STAND

AC

-  131cm
-  333cm
-  131cm
-  126cm
-  8.3kg
-  40kg
-  3kg@333cm
-  Type 14
-  109, 110, 110G

Chrome plated steel stand. 3 sections, 2 risers. Ø: 40, 35, 30mm. Leg Ø: 22mm. 1 levelling leg.

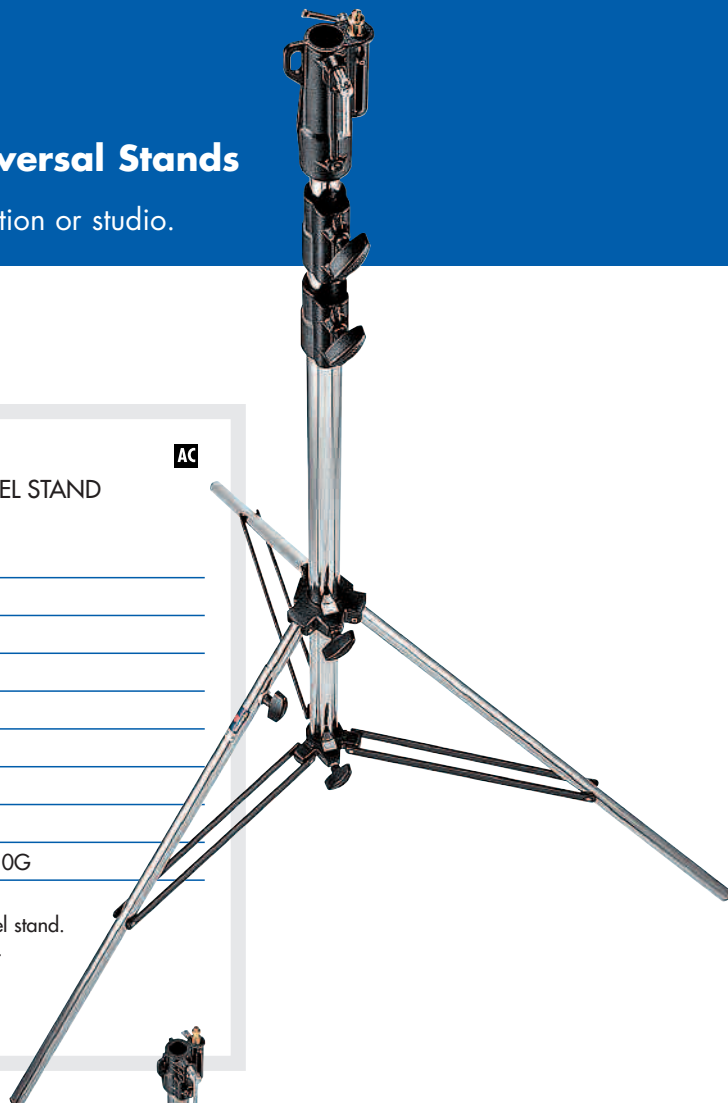


270CSU

SUPER STEEL STAND

B

-  144cm
-  477cm
-  144cm
-  174cm
-  13.5kg
-  40kg
-  12kg@477cm
-  Type 14
-  103, 104, 104G

Chrome plated steel stand. 4 sections, 3 risers. Ø: 50, 45, 40, 35mm. Leg Ø: 30mm. 1 levelling leg. There is a reason we call this the super stand! Incredible reach of 477cm that can support fixtures up to 40kg.

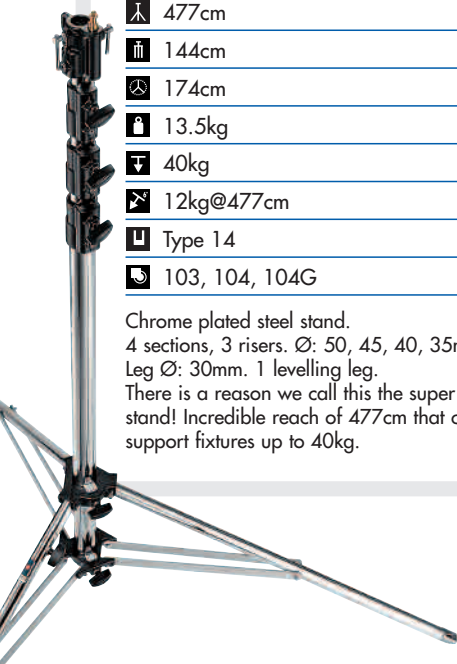

070CSU

FOLLOW SPOT STAND

B

-  88cm
-  147cm
-  105cm
-  109cm
-  6.8kg
-  40kg
-  18kg@147cm
-  Type 14
-  103, 104, 104G

Chrome plated stand. 2 sections, 1 riser. Ø: 50, 40mm. Leg Ø: 30mm. 1 levelling leg. Memory collar included. This stand was named for its low height and high payload allowing the lighting technician to easily follow an actor.



126BSU

BLACK HEAVY DUTY STAND

-  131cm
-  333cm
-  131cm
-  126cm
-  8.3kg
-  40kg
-  3kg@330cm
-  Type 14
-  109, 110, 110G

Black chrome plated steel stand. 3 sections, 2 risers. Ø: 40, 35, 30mm. Leg Ø: 22mm. 1 levelling leg.



Roller Stands

Smooth-running studio performers.

MAX payload 12kg

- All with low profile bases that slip easily into position on set.
- All stands supplied with free running wheels and positive brakes.
- Available with several attachment options.

299B








BABY STUDIO STAND

	108cm
	272cm
	105cm
	75cm
	4.8kg
	12kg
	2.2kg@272cm
	Type 3 + Spigot LS.013

Black steel base, black anodised aluminium sections, complete with wheels.
3 sections, 2 risers.
Ø: 35, 30, 25mm.
1 levelling leg.

A5029

ROLLER STAND 29 low base

	125cm
	290cm
	123cm
	100cm
	6.4kg
	12kg
	
	16mm

Legs and column in steel, risers in aluminium, complete with wheels.
3 sections, 2 risers.
Ø: 35, 30, 25mm.
Leg: 20 x 20mm.

A5043

ROLLER STAND 43 low base

	146cm
	430cm
	135cm
	106cm
	6.9kg
	12kg
	
	16mm

Legs and column in steel, risers in aluminium, complete with wheels.
4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg: 20 x 20mm.

A5017

A5033

ROLLER STAND 17 33 FOLDING BASE

	75cm	115cm
	170cm	330cm
	66cm	105cm
	75cm	75cm
	6kg	6.3kg
	12kg	12kg
		
	16mm	16mm

Legs and column in steel, risers in aluminium, complete with wheels.
3-4 sections, 2-3 risers.
Ø: 35, 30, 25, 20mm.

Stands **Roller Stands**

Smooth-running studio performers.

MAX payload 12-40kg

A5012 A5034

ROLLER STAND 12 34
FOLDING BASE

	78cm	142cm
	120cm	340cm
	68cm	132cm
	75cm	75cm
	8kg	10.7kg
	25kg	20kg
	16mm	16mm

Legs and column in steel, risers in aluminium, complete with wheels.
3/4 sections, 2/3 risers.
Ø: 35, 30, 25, 20mm.
1 levelling leg.



A5036CS A5042CS

HIGH JUNIOR FOLDING
BASE STUDIO STAND

	156cm	166cm
	360cm	420cm
	130cm	142cm
	140cm	150cm
	13.6kg	15.4kg
	40kg	40kg
	28mm+	16mm

Legs and column in steel, risers in aluminium, complete with wheels.
3/4 sections, 2/3 risers.
Ø: 45, 40, 35, 30mm.
1 levelling leg.



298B

ALU-STUDIO STAND

	129cm
	300cm
	125cm
	100cm
	6kg
	15kg
	5kg@300cm
	Type 14

Black steel base, black anodised aluminium sections, complete with wheels. 3 sections, 2 risers.
Ø: 35, 30, 25mm. 1 levelling leg.



Stands **Folding Base Stands**

Folding Base Stands - running studio performers!

MAX payload 40kg

- These bases can be used for backlights of most sizes.
- Simply add a century stand column to create your own rolling stand.
- For leg storage folds up in a small package.
- Universal head with 28mm sockets plus either 16mm socket or "pop-up" spigot.
- Low profile base that slips easily into position on sets.
- Leg levelling feature.

299BBASE

BRAKE BASE SMALL

📏 28cm	
📏 36cm	
📏 75cm	
📏 4.8kg	
📏 40kg	
📏 Type 14	

1 levelling leg.
Complete with braked wheels.




299FBASE

FOOT BASE SMALL

📏 21cm	
📏 36cm	
📏 75cm	
📏 3.5kg	
📏 40kg	
📏 Type 14	

1 levelling leg.
Complete with feet.

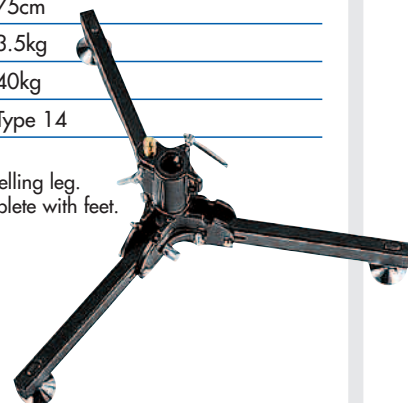

297BBASE

BRAKE BASE LARGE

📏 28cm	
📏 52cm	
📏 100cm	
📏 5.7kg	
📏 40kg	
📏 Type 14	

1 levelling leg.
Complete with braked wheels.




297FBASE

FOOT BASE LARGE

📏 21cm	
📏 52cm	
📏 100cm	
📏 4.4kg	
📏 40kg	
📏 Type 14	

1 levelling leg.
Complete with feet.

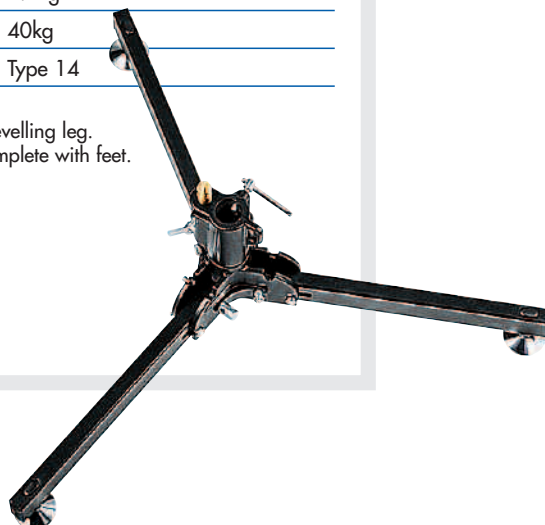

Stands **Combo Stands**

MAX payload 30kg
ALUMINIUM

A1020B

ALU COMBO STAND 20

 110cm

 198cm

 93cm

 80cm

 6kg

 25kg



 28mm+16mm

 A9000B

Aluminium legs with aluminium risers.
3 sections, 2 risers. Ø: 45, 40, 35mm.
Leg: 25 x 25mm. 1 levelling leg.




A1045B

ALU COMBO STAND 45

 179cm

 450cm

 155cm

 134cm

 7kg

 30kg



 28mm+16mm

 A9000B

Aluminium legs with aluminium risers.
4 sections, 3 risers. Ø: 45, 40, 35, 30mm.
Leg: 25 x 25mm. 1 levelling leg.




A1035B

ALU COMBO STAND 35

 168cm

 350cm

 142cm

 134cm

 7 kg

 30kg



 28mm+16mm

 A9000B

Aluminium stand.
3 sections, 2 riser.
Ø: 45,40,35mm.
Leg : 25x25mm.
1 levelling leg.

The industry workhorse, for trouble free service on location and in the studio.

MAX payload 40kg

STEEL



A1010CS

STEEL COMBO STAND 10

64cm

100cm

62cm

57cm

4.5kg

30kg

28mm+16mm

A9000

Chrome steel stand.
2 sections, 1 risers.
Ø: 35,30mm.
Leg: 20 x 20mm.
1 levelling leg.



A1035CS

STEEL COMBO STAND 35

168cm

350cm

142cm

134cm


12kg

40kg

28mm+16mm

A9000

Chrome steel stand.
3 sections, 2 risers.
Ø: 45, 40, 35mm.
Leg: 25 x 25mm.
1 levelling leg.

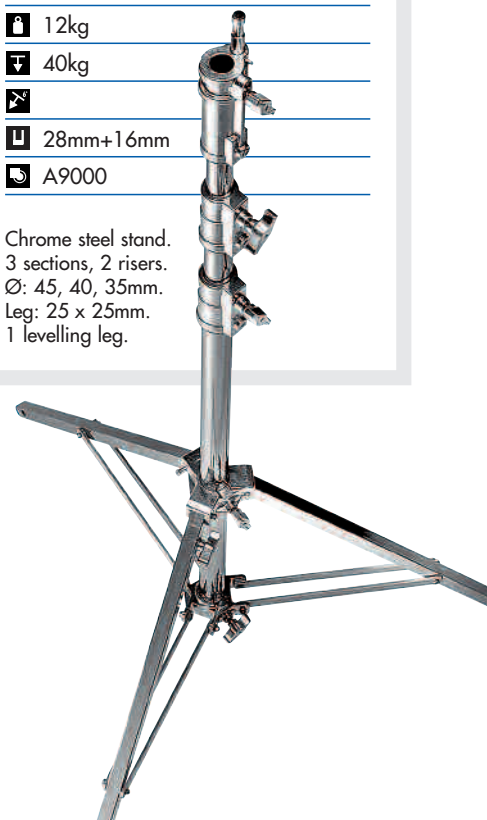

A1045CS

STEEL COMBO STAND 45

179cm

450cm

155cm

134cm

13kg

40kg

28mm+16mm

A9000

Chrome steel stand.
4 sections, 3 risers.
Ø: 45, 40, 35, 30mm.
Leg: 25 x 25mm.
1 levelling leg.

A1020CS

STEEL COMBO STAND 20

110cm

198cm

93cm

80cm

7.8kg

35kg

16mm

28mm

A9000

3 sections, 2 risers
Chrome steel stand.
Leg: 25 x 25mm
1 levelling leg

Stands **Overhead Stands**

Support your 'butterfly' material in a stable position.

MAX payload 30-40kg

- Overhead stands are designed to support butterfly frames and backdrops, but their use is virtually limitless due to their high reach and wide base.
- The top of the stand is fitted with a 115cm grip head, which accepts the butterfly ears; and a 28mm socket for fixtures with a junior pin. The stands with wheels have a special casting to protect the wheels during storage.
- Wide base for greatest stability at maximum heights.
- Legs may be locked partially open for working in tight environments.
- Roller versions fitted with efficient braked wheels.

A3065CS

WIDE BASE OVERHEAD STAND 65

189cm

638cm

197cm

204cm

21.5kg

30kg

28mm

115mm

Chrome steel stand.
5 sections, 4 risers.
Ø: 50, 45, 40, 35, 30mm.
Leg Ø: 30mm.
1 levelling leg.

A3056CS

WIDE BASE OVERHEAD STAND 56

199cm

557cm

195cm

196cm

16.8kg

40kg


9.5kg@557cm

28mm

115mm

A9000

Chrome steel stand.
4 sections, 3 risers.
Ø: 45, 40, 35, 30mm.
Leg: 25 x 25mm. 1 levelling leg.

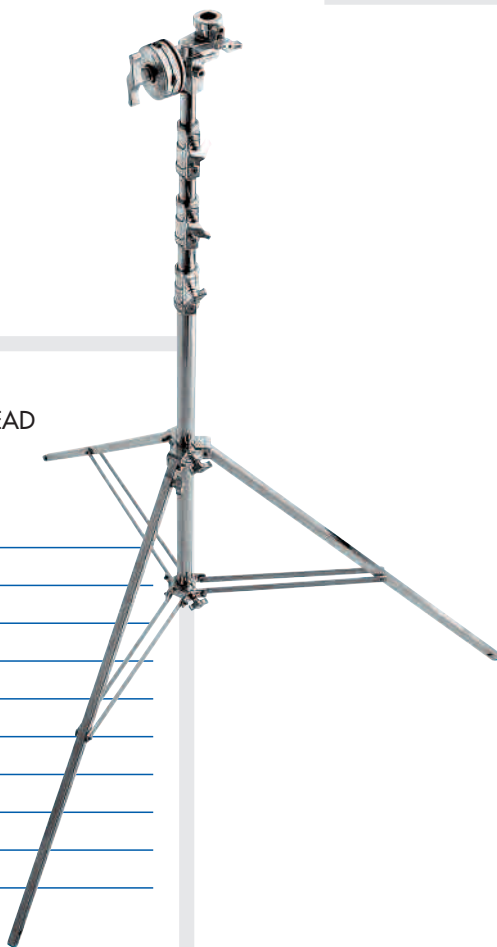

Multi-function head with
115mm grip head and
28mm socket.

A3042CS

OVERHEAD STAND 42 STANDARD BASE

143cm

423cm

135cm

129cm

11.8kg

40kg

28mm

115mm

Chrome steel stand
wheels optional A9000
4 sections, 3 risers.
Ø: 45, 40, 35, 30mm.
Leg: 25 x 25mm.

A3059CS

OVERHEAD STAND 59 STANDARD BASE

177cm

588cm

167cm

129cm

14kg

40kg

28mm

115mm

Chrome steel stand
braked wheels optional A9000
Ø: 45, 40, 35, 30mm. Leg: 25 x 25mm.
Important! Counterweight sandbags must
always be used on the legs to ensure safe,
stable operation even at full height extension.

A3043CS

OVERHEAD STAND 43 WITH BRAKED WHEELS

153cm

432cm

150cm

154cm

16kg

40kg

28mm

115mm

Chrome steel stand complete with braked wheels.
4 sections, 3 risers. Ø: 45, 40, 35, 30mm.
Leg: 25 x 25mm.

A3058CS

OVERHEAD STAND 58 WITH BRAKED WHEELS

186cm

579cm

182cm

154cm

18.3kg

40kg

28mm

115mm

Chrome steel stand. 4 sections, 3 risers.
complete with braked wheels
Ø: 45, 40, 35, 30mm. Leg: 25 x 25mm.
Important! Counterweight sandbags must
always be used on the legs to ensure safe,
stable operation even at full height extension.



Stands Century Stands

The first choice when it comes to supporting flags and scrims but equally at home supporting luminaires.

- 20", 30", 40" and 60" stands - heights up to 482cm with loads up to 10kg.
- Fold away, spring loaded legs with unique mounts which are easy to replace.
- Deep inset plastic feet that do not come off in use.
- High quality finish resists all weather conditions.
- Detachable base stand - also available as turtle base only.
- Captive "T" handles.

CENTURY STAND



A2033FKIT

Fixed base

A2018F

not illustrated

C- STAND 18

84cm	4.3kg
175cm	8kg
84cm	
95cm	16mm
CB J	

A2025F

not illustrated

C-STAND 25

110cm	4.8kg
253cm	10kg
110cm	
95cm	16mm
CB J	

A2033F

not illustrated

C- STAND 33

134cm	5.5kg
328cm	10kg
134cm	
95cm	16mm
CB J	

A2033FKIT

C- STAND KIT 33

chrome plated steel stand

includes:

A2033F C-STAND

D200 GRIP HEAD

D520 EXTENSION GRIP ARM

Sliding leg

A2018L

not illustrated

C-STAND 18 SLIDING LEG

84cm	4.3kg
175cm	8kg
84cm	
95cm	16mm
CB J	

A2025L

not illustrated

C-STAND 25 SLIDING LEG

110cm	5.8kg
253cm	10kg
110cm	
95cm	16mm
CB J	

A2033L

not illustrated

C-STAND 33 SLIDING LEG

134cm	4.8kg
253cm	10kg
110cm	2kg@253cm
95cm	Type 33
CB J B	

A2033LKIT

not illustrated

C- STAND KIT 33 SLIDING LEG

chrome plated steel stand

includes:

A2033L C-STAND

D200 GRIP HEAD

D520 EXTENSION GRIP ARM

Detachable base

A2016D

not illustrated

C- STAND 16 DETACHABLE

84cm	5.6kg
155cm	10kg
84cm	
95cm	16mm
	28mm

CB J

A2022D

not illustrated

C- STAND 22 DETACHABLE

110cm	5.9kg
222cm	10kg
110cm	
95cm	16mm
	28mm

CB J

A2030D

not illustrated

C- STAND 30 DETACHABLE

134cm	6.2kg
300cm	10kg
134cm	
95cm	16mm
	28mm

CB J

A2030DKIT

not illustrated

C-STAND KIT 30 DETACHABLE

chrome plated steel stand

includes:

A2030D C-STAND

D200 GRIP HEAD

D520 EXTENSION GRIP ARM

Double riser columns

A2014

not illustrated

C-STAND COLUMN 14

68cm
139cm
2.2kg
16mm
CB J

A2020

not illustrated

C-STAND COLUMN 20

95cm
206cm
2.8kg
16mm
CB J

A2029

not illustrated

C-STAND COLUMN 29

118cm
285cm
3.3kg
16mm
CB J

Turtle bases

A2007

not illustrated


C-STAND MINI BASE

27cm
75cm
2.7kg
28mm
CB

A2009

C-STAND BASE

27cm
95cm
3kg
28mm
CB

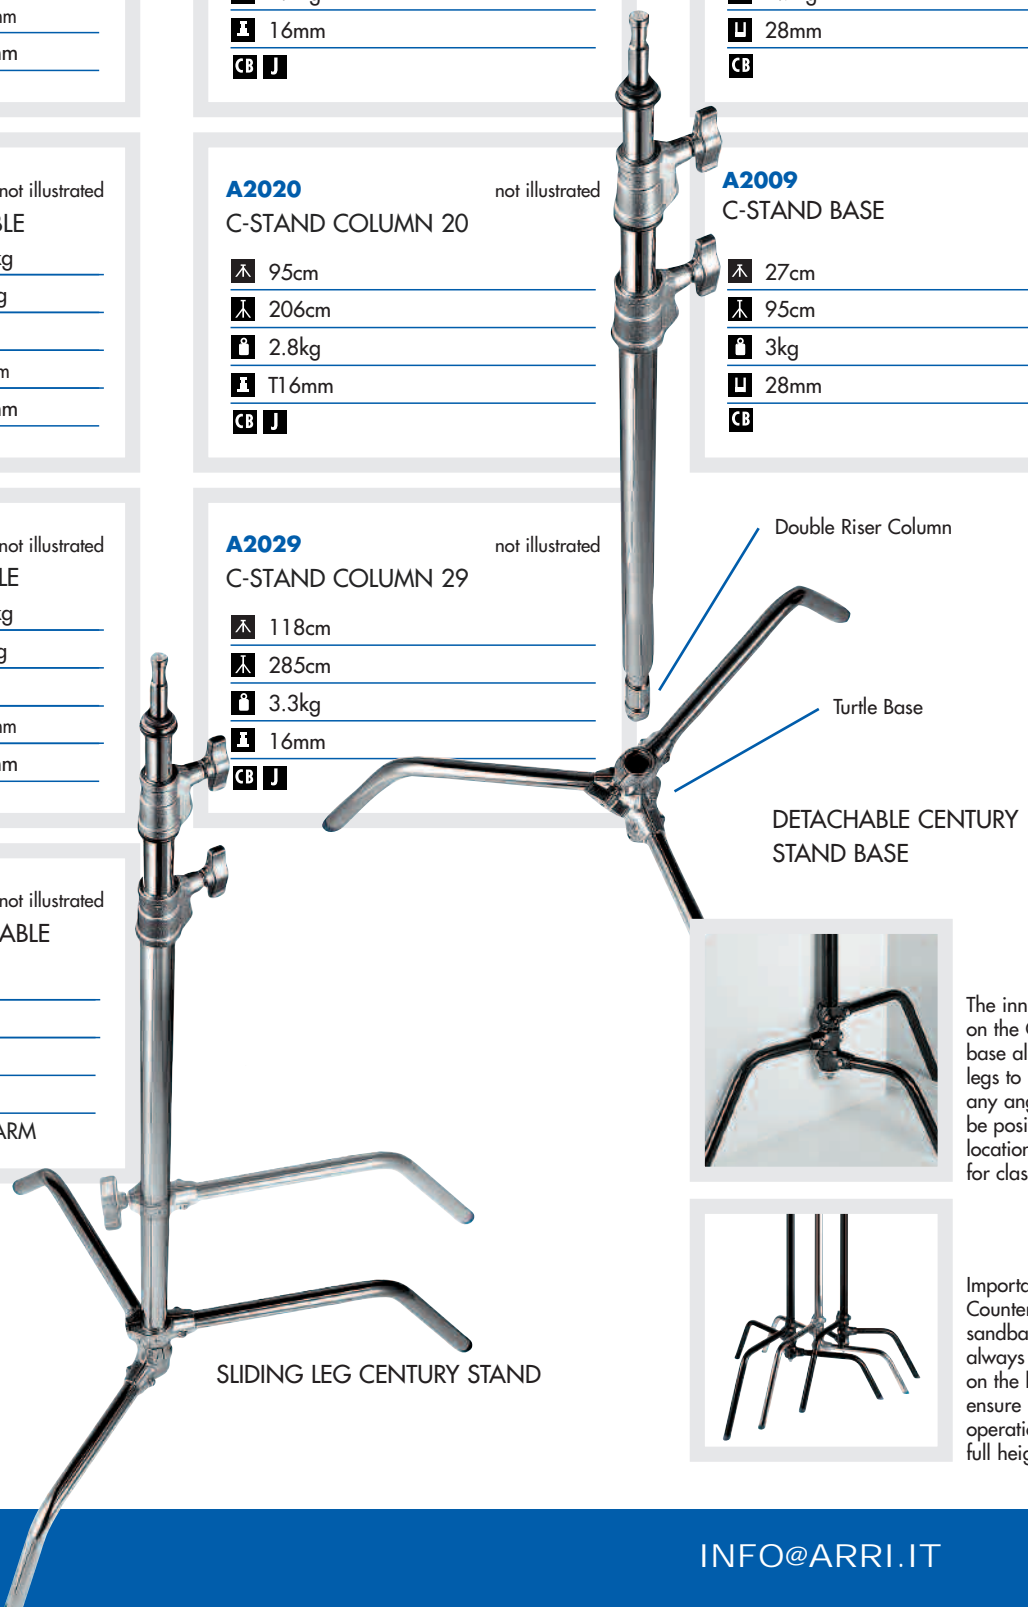


Double Riser Column

Turtle Base

DETACHABLE CENTURY
STAND BASE

SLIDING LEG CENTURY STAND



The innovative design on the Century stand base allows individual legs to be set at any angle, and can be positioned in locations not possible for classic stands.



Important!
Counterweight sandbags must always be used on the legs to ensure safe, stable operation even at full height extension.

Stands **Boom Stands**

A stand and a boom, all in one!!!

MAX payload 30kg

- Using a special articulated joint which works both as a locking collar and as a pivoting boom clamp, all ARRI upright boom stands can rapidly be converted into stands with horizontal boom arms.
- Our unique boom stands are the perfect answer to those who need the flexibility of a boom and a light stand in one unit. Available in lightweight aluminium and steel for any type of shoot.
- Equipped with the most popular light attachments: 16mm pin, 16mm and 28mm sockets.

420B

BLACK ALU COMBI-BOOM STAND
(WITH SANDBAG)

131cm

392cm

113cm

109cm

2.7kg

9kg

0.9kg@392cm

Type 25 + Spigot LS.013

018

Black aluminium stand.
Supplied with sandbag counterweight (empty) for maximum stability and smoothness.

4 sections, 3 risers.

Ø: 35, 30, 25, 20mm.

Leg Ø: 22mm.

Minimum extension boom: 19cm.

Maximum extension boom: 191cm.

Maximum load at boom full extension:
2kg with counterweight.



420CSU

HD COMBI BOOM (WITH SANDBAG)

5.6kg

12kg

1.5kg@392cm

Same as 420B

Legs and column in chrome steel and top two sections in aluminium.

Supplied with sandbag counterweight (empty) for maximum stability and smoothness.

4 sections, 3 risers.

Ø: 35, 30, 25, 20mm.

Leg Ø: 22mm.

Minimum extension boom: 19cm.

Maximum extension boom: 191cm.


Maximum load at boom full extension:
5kg with 35kg counterweight.



Boom Stand Attachment



Boom Stand Pivoting Collar



Boom Stands

A4041B

ALU BOOM STAND 41

-  139cm
-  413cm
-  124cm
-  129cm
-  4.6kg
-  10kg
-  A9000B
-  Type 33

Supplied with sandbag counterweight (empty) for maximum stability and smoothness.
Black aluminium stand.
4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg: 20 x 20mm.
1 levelling leg.
Min extension boom
113cm - Max load 15kg.
Max extension boom
213cm - Max load 5kg.

A4050CS

STEEL BOOM STAND 50

-  188cm
-  500cm
-  165cm
-  135cm
-  15kg
-  30kg
-  28mm+16mm
-  A9000

Chrome steel stand.
4 sections, 3 risers.
Ø: 45, 40, 35, 30mm.
Leg: 25 x 25mm.
1 levelling leg.
Min extension boom
155cm - Max load 30kg.
Max extension boom
266cm - Max load 8kg.

A4039CS

STEEL BOOM STAND 39

-  131cm
-  392cm
-  113cm
-  109cm
-  8.4kg
-  12kg
-  16mm
-  A9000

Chrome steel stand.
4 sections, 3 risers.
Ø: 35, 30, 25, 20mm.
Leg: 20 x 20mm.
1 levelling leg.

Stands **Wind Up Stands**

High and mighty wind-ups that set the industry standard.

MAX payload 30kg

- Chrome or stainless steel, single and double risers which extend simultaneously.
- Fold away crank handle.
- Third internal safety cable ensures simultaneous retrieval of all risers.
- Levelling leg for easy positioning and stability.
- Double braced leg base for extra stability and safety.

B6030CS

LOW BASE WIND-UP STAND 30 WITH BRAKED WHEELS

▲	153cm
▲	296cm
▢	175cm
▲	142cm
⬆	17.8kg
⬇	30kg
⚙	
⌵	T28mm+16mm

Chrome steel stand.
3 sections, 2 risers.
Ø: 55, 45, 38mm.
Leg Ø: 30mm.
1 levelling leg.

B6039CS

WIND-UP STAND 39 WITH BRAKED WHEELS

■	181cm
■	390cm
■	201cm
■	142cm
■	24kg
■	30kg
■	
■	28mm+16mm

Chrome steel stand.
3 sections, 2 risers.
Ø: 55, 45, 38mm.
Leg Ø: 30mm.
1 levelling leg.



B6026CS

WIND-UP STAND 26 WITH BRAKED WHEELS

▲	153cm
▲	261cm
▢	173cm
▲	152cm
⬆	19kg
⬇	45kg
⚙	
⌵	28mm+16mm

Chrome steel stand.
2 sections, 1 riser.



087NW

3 SECTION WIND-UP STAND

B

📏	167cm
📏	370cm
📏	181cm
📏	128cm
📏	21.4kg
📏	30kg
📏	30kg@370cm
📏	Type 14
📏	104, 104G, 374-10

Chrome steel stand with geared column.
2 risers extend simultaneously at an elevation of 4.4cm per handle turn.
Safety cable ensures simultaneous retrieval of all sections.
3 sections, 2 risers
Ø: 55, 45, 38mm.
Leg Ø: 30mm.
1 levelling leg.



087NWSH

3 SECTION SHORT WIND-UP STAND

📏	135cm
📏	276cm
📏	155cm
📏	128cm
📏	15.5kg
📏	30kg
📏	15kg@276cm
📏	Type 14
📏	104, 104G, 374-10

Short version of LS.087.
3 sections, 2 risers.
Ø: 55, 45, 38mm.
Leg Ø: 30mm.
1 levelling leg.



Stands **Wind Up Stands**

High and mighty wind-ups that set the industry standard.

MAX payload 30-45kg

087NWL

3 SCT LOW BASE
WIND-UP STAND

- 144cm
- 276cm
- 134cm
- 100cm
- 16kg
- 30kg
- 5.5kg@276cm
- Type 14

Geared centrepost steel stand.
3 sections, 2 risers.
Ø: 55, 45, 38mm.
1 levelling leg.
Fitted with braked wheels.



083NW

STEEL 2 SCT WIND-UP STAND

- 139cm
- 247cm
- 153cm
- 128cm
- 16kg
- 45kg
- 30kg@247cm
- Type 14

Chrome steel stand
with geared column.
Elevation: 2.2cm per handle turn.
2 sections, 1 riser.
Ø: 55, 45mm.
Leg Ø: 30mm.
1 levelling leg.
Optional wheels 104, 104G, 374-10



SUPER WIND UP STANDS

MAX payload 80kg

387XU

SUPER WIND-UP STAINLESS
STEEL STAND

📏 156cm

📏 366cm

📏 179cm

📏 180cm

📏 32.5kg


📏 80kg

📏 80kg@366cm

📏 28mm

📏 374

Heavy lift stand with strengthened stainless steel column and legs, chrome steel risers and geared column. 3 section Ø: 70, 60, 50mm. 2 risers which extended simultaneously at 4.4cm per handle turn. Safety cable ensures simultaneous retrieval of all sections. Rapid adjustment. Leg Ø 35mm. 1 levelling leg.

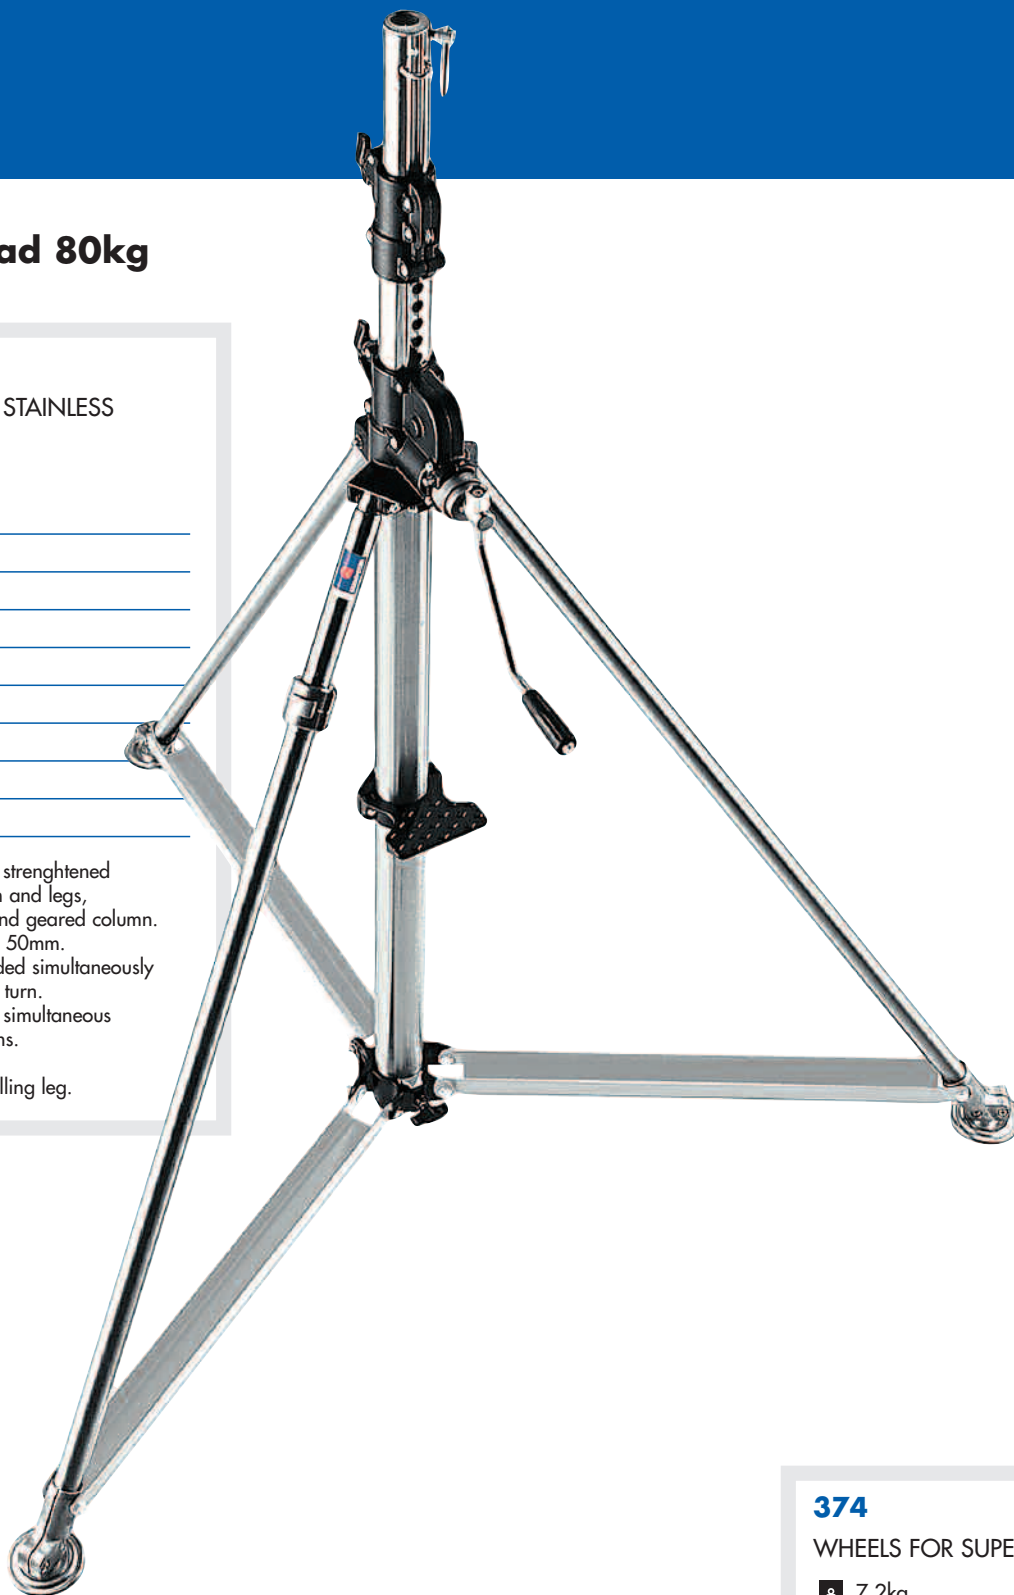

374

WHEELS FOR SUPER WIND UP

📏 7.2kg

Ø: 160mm with brakes. Set of three.



MAX payload 80kg

B6029X

STAINLESS LOW BASE
SUPER WIND UP 29 STAND

📏 140cm

📏 290cm

📏 156cm

📏 130cm

📏 34kg

📏 80kg

📏

📏 28mm

📏

Heavy lift stand with strengthened stainless steel column and legs, chrome steel risers and geared column. 3section Ø: 70, 60, 50mm.

Complete with braked wheels
Safety cable ensures simultaneous retrieval of all sections.

Rapid adjustment.

Leg Ø 35mm. 1 levelling leg.



B6040X

STAINLESS STEEL
SUPER WIND UP 40 STAND

📏 172cm

📏 386cm

📏 196cm

📏 180cm

📏 39 KG

📏 80 KG

📏

📏 28mm

Complete with braked wheels
Safety cable ensures simultaneous retrieval of all sections.

Leg Ø 35mm. 1 levelling leg.



The codes B6035X, B6040X, B7018, B7059FF are assembled using the new foam fill wheels.

Stands **Super Crank Stands**

Super Crank Stands meet industry requirements for extra-safe operation with heavy loads.

MAX payload 60-100kg

- Super Crank stands surpass industry requirements for extra-safe operation with heavy loads up to 100kg.
- Double safety with direct drive gear mechanism and secondary safetylock - no pulleys or cables.
- High extension versions can replace lighting or speaker towers.
- Standard version of each Super Crank stand is provided with hard braked wheels.
- No clutch adjustments necessary.

B7018

STRATO SAFE STAND 18
WITH BRAKED WHEELS

105cm

175cm

126cm

120cm

27kg

100kg



28mm



Aluminium legs with chrome steel column.
Complete with braked wheels.
2 sections, 1 risers.
Ø: 70, 60mm.
Leg: 35 x 35mm.



B7035CS

STRATO SAFE STAND 35

155cm

350cm

186cm

182cm

64kg

90kg



28mm



Chrome steel stand complete
with braked wheels.
3 sections, 2 risers.
Ø: 90, 80, 70mm.
Leg: 35 x 35mm.




WIND-UP CRANK

Crank-up
gear systems

Easy to use
ratchet crank
handle

Secondary
Safety lock

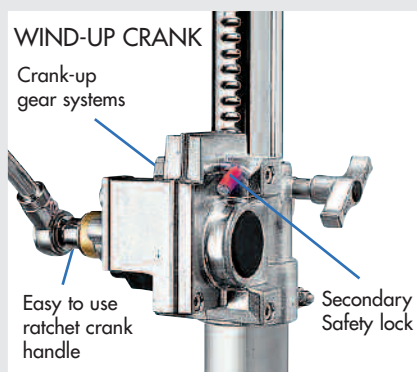



B7047CS

not illustrated

STRATO SAFE STAND 47 WITH BRAKED WHEELS

172cm

467cm

209cm

213cm

62kg

70kg

28mm

GC

Chrome steel stand complete
with braked wheels.
3 sections, 2 risers.
Ø: 90, 80, 70mm.
Leg: 35 x 35mm.
Includes Wind Brace Kit code B9000W.



B7043CS

STRATO SAFE STAND 43 WITH BRAKED WHEELS

155cm

427cm

185cm

182cm

60kg

70kg

28mm

GC

Chrome steel stand complete
with braked wheels.
4 sections, 3 risers.
Ø: 90, 80, 70, 60mm.
Leg: 35 x 35mm.

Stands **Long John Silver Stand**

Super Crank Stands meet industry requirements for extra-safe operation with heavy loads.

B7057

LONG JHON SILVER STAND WITH BRAKED WHEELS

177cm

570cm

224cm

240cm

85kg

120kg



28mm

Heavy duty stand complete with pneumatic
braked wheels.

5 sections, 4 riser.

Includes wind brace kit B9000W

Leg: 35 x 35mm.

B7057FF

LONG JHON SILVER STAND WITH FOAM FILL WHEELS

177cm

570cm

224cm

240cm

85kg

120kg



28mm


Heavy duty stand complete with foam fill
braked wheels.

Includes wind brace kit B9000W





Easy rolling transport with base closed.




Built-in wind bracing mounts.




Pull and turn tracking pin to lock the wheels in 6 positions.

New gear box mechanism to prevent reversing.

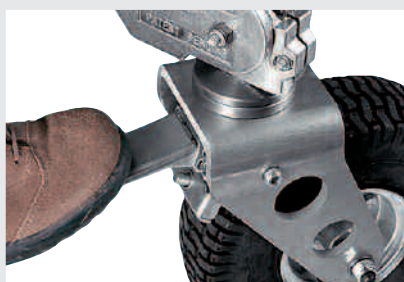

Double action brake.



Additional locking cable during transportation.


Spirit level for vertical positioning.



Secondary safety lock.



Foldable handle for transport.

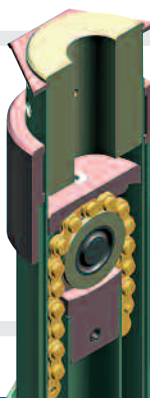

Fork lift chain drive with 20 times safety factor.



Accessories - Wheels for Stands

- Our range of stand accessories offers some indispensable items and broadens the range of application of your existing stands. From wheels for moving the stand rapidly from position to position on set, to stand height extensions for when that extra reach is crucial...

104

WHEEL SET

 1.5kg

Ø: 75mm with brakes and M10 attachment.
Set of three.



017

CASTER WHEEL SET

 0.45kg

Caster wheel set for stands with legs Ø: 19mm.
Set of three.



018

CASTER WHEEL SET

 0.45kg

Caster wheel for stands with legs Ø: 22mm.
Set of three.



110

WHEEL SET

 1.7kg

Ø: 75mm with brakes and adapter for legs Ø: 22mm.
Set of three.



109

WHEEL SET

 1.43kg

Ø: 80mm without brakes and adapter for legs Ø: 22mm.
Set of three.



104G

WHEEL SET

 3kg

Ø: 100mm with brakes and M10 attachment.
Set of three.



110G

WHEEL SET

 3.2kg

Ø: 100mm with brakes and adapter for legs Ø: 22mm.
Set of three.




A9000

BRAKED WHEEL

 3.3kg

Ø: 100mm for 25 x 25mm and 20x20mm square legs. Set of three.

A9000B not illustrated
BRAKED WHEEL BLACK



374

WHEELS FOR SUPER WIND UP

 7.2kg

Ø: 160mm with brakes. Set of three.

374-10

WHEELS FOR WIND-UP STANDS

 7.2kg not illustrated

Ø: 160mm with brakes and M10 attachment. Set of three.





Stands Extensions

Improve your stands' performance!

C622

SMALL STEEL STAND EXTENSION

 1.59kg

 Top 28mm+16mm

 Bottom 28mm

Chrome length plated
steel extension.
Length: 28cm.



C590


CONKA BONKA SET

 1.09, 1.25, 1.75kg

 Top 16mm


 Bottom 16mm


Set of three chrome plated
steel Cine Extensions.
150mm, 270mm and 675mm

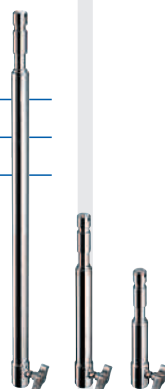

C624

MEDIUM STEEL STAND EXTENSION

 1.72kg

 Top 28mm+16mm


 Bottom 28mm

Chrome length plated
steel extension.
Length: 39cm.




1122B

POLE FOR BACKLITE STAND

 0.34kg

 Top type 18

 Bottom type 19


2 section (Ø 22, 19mm)
black aluminium pole.
Minimum height: 47cm.
Maximum height: 74.5cm.



C626

LONG STEEL STAND EXTENSION

 1.89kg

 Top 28mm+16mm

 Bottom 28mm

Chrome length plated
steel extension.
Length: 52cm.



L2.89303.0 / 1099B

BABY STAND EXTENSION

 0.70kg

 Top type 19

 Bottom type 1


3 section (Ø 25, 22, 19mm)
black aluminium extension.
Minimum height: 90cm.
Maximum height: 235cm.



142CS

STEEL STAND EXTENSION

 3.6kg

 Top type 14

 Bottom type 37


2 sections (Ø 35, 30mm)
chrome steel extension.
Minimum height: 125cm.
Maximum height: 210cm.



146CS

HIGH STAND EXTENSION

 4.8kg

 Top type 14


 Bottom type 37

3 sections (Ø 35, 30, 25mm)
chrome steel extension.
Minimum height: 137cm.
Maximum height: 314cm.



142B

BLACK ALU STAND EXTENSION

 2.4kg

 Top type 14

 Bottom type 37

2 sections (Ø 35, 30mm)
black aluminium extension.
Minimum height: 125cm.
Maximum height: 210cm.



146B

BLACK ALU HIGH STAND EXTENSION

 2.8kg

 Top type 14

 Bottom type 37

3 sections (Ø 35, 30, 25mm)
black aluminium extension.
Minimum height: 137cm.
Maximum height: 314cm.



Stands **General Accessories**

Improve your stands' performance!

027

STAND HOLDER

 2.8kg

Holder for 8 light stands.
Width: 115cm.
Distance between fixing holes: 64.4cm.
Depth: 19cm.




L2.88674.0 / 087WBK

WIND-BRACING KIT

 1kg

Wind bracing kit of 3 ropes

Length: 10m.
Not supplied with the stand.

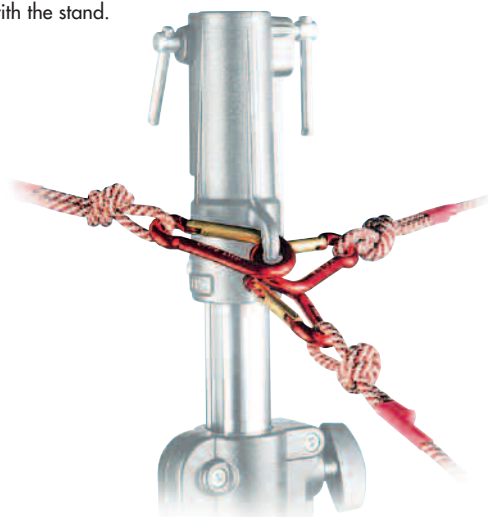

ARNOLD & RICHTER CINE TECHNIK

Lichttechnik, Pulvermühle,
83071 Stephanskirchen
Tel +49 80 36 30 09 84
Fax +49 80 36 30 09 79

ARRI ITALIA S.r.l.,

Viale Edison 318,
20099 Sesto S. Giovanni, Milano
Tel +39 02-26 22 71 75
Fax +39 02-242 16 92

Distribution by:



ARRI ITALIA s.r.l.

Viale Edison 318
20099 Sesto San Giovanni Milano
Tel +39 02 26 22 71 75
Fax +39 02 24 21 692

INFO@ARRI.IT