


SONY

4K/HD Ultra High Frame Rate Camera System

HDC-4800

4K Baseband Processor

BPU-4800

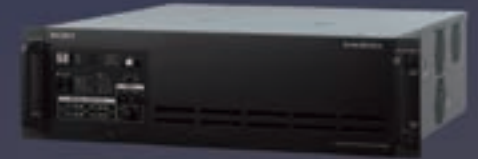

4K

SUPER MOTION

Open Up a New World of Live Production Shooting

The HDC-4800, combined with its dedicated BPU-4800 4K Baseband Processor, delivers breathtaking 4K Ultra HD images at up to 8x (479.52 fps)/4x (239.76 fps) slow motion*¹ or Full HD at up to 16x (959.04 fps)/8x (479.52 fps) slow motion*² and features Full HD cutout and zoom capabilities. Used on its own, the HDC-4800 delivers 4K Ultra HD standard speed images or Full HD at up to 4x slow motion with outstanding high sensitivity as standard.

This all-in-one, fully networked 4K live ultra-high frame rate recording and playback system will be a game changer for broadcasting live events as well as live sports action.




*¹ Optional SZC-4008 software is required.

*² Optional SZC-2016 software is required.

New 4K Imager for Live Sports and Multi-Camera Productions


The HDC-4800 has a new sophisticated Super 35 mm CMOS sensor with a global shutter system that lets the camera take full advantage of PL mount lenses. You'll enjoy stunning 4K images that capture fast-moving sports with incredible definition. For extra operational convenience, there's a motorized dual ND/CC filter that can be operated remotely for variable exposure control. It also provides support for B4 lenses via a supplied adaptor for HD production.



Every Split-Second Of Sporting Action, Captured In 4K

You can capture the dynamic excitement of live sports in 4K Ultra slo-mo with the HDC-4800, together with its dedicated 4K baseband processor, the BPU-4800. You can also shoot full-resolution 4K Ultra HD images at up to 8x or Full HD at 16x to reveal split-second action.


This all-in-one solution for ultra-high frame rate recording and playback makes it easier for broadcast production personnel to deliver the superb slo-mo coverage of sports and other live events that TV viewing audiences love.

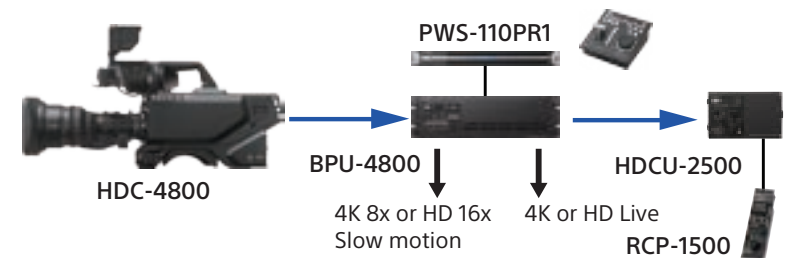

Share Play: Efficient File Sharing Function over IP Networking

The Share Play function can be utilized when the system is configured with the PWS-4500 server connected to the HDC-4800 together with the BPU-4800 via the network.

Once clips have been recorded by the BPU-4800, the Share Play function enables these clips to be shared among all connected PWS-4500 servers. This delivers a more efficient workflow. For example, PWS-4500 server operators and highlight operators can view the clips in the BPU-4800, and can playback and output any of these clips from their own local server. There is no need to push or pull clips between different servers.

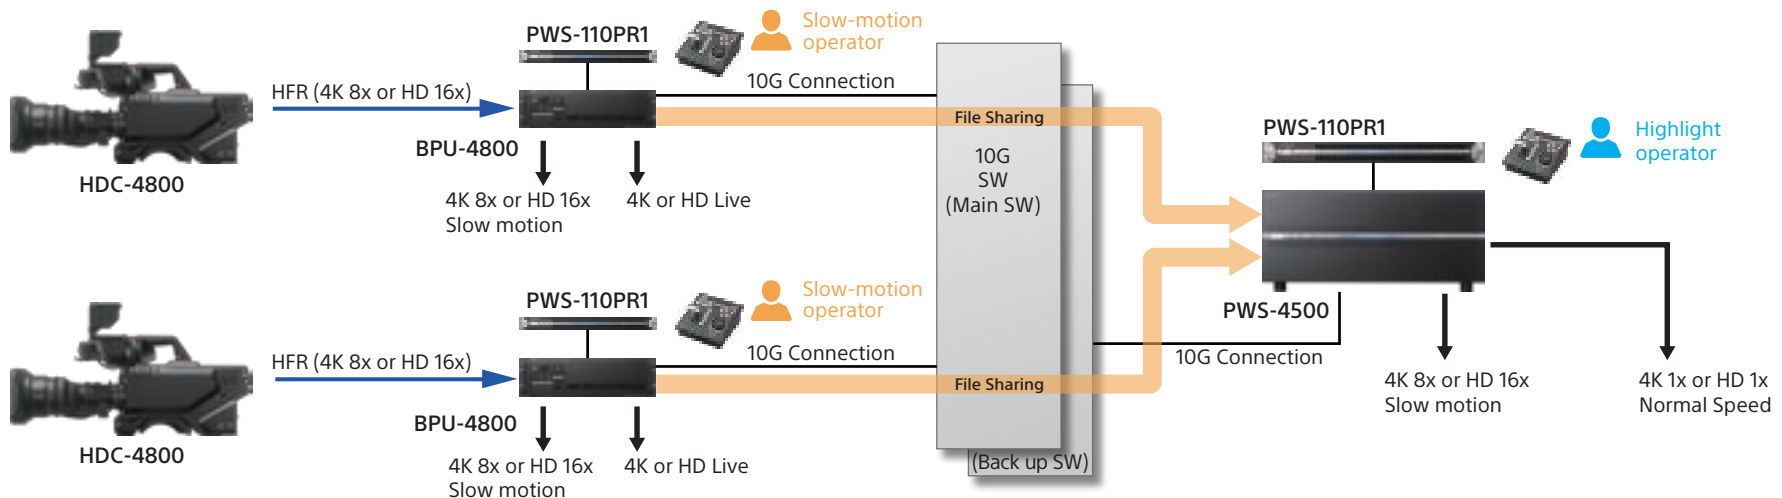

*An optional PWSK-4505 BPU Share Play Board is required to be installed in the PWS-4500.

Replay Function

Using just the HDC-4800 and BPU-4800 along with control devices*, you can create a powerful replay server system with intuitive GUI operation that includes slow-replay control, highlight editing, and touch-panel capabilities.

*The PWSK-4403 Control Panel, the PWS-100PR1 Production Control Station, and the PWS-110MG1 Media Gateway Station are required for the replay system.



HD Cutout Function


Powerful processing allows a Full HD high frame rate (HFR) image to be cut out from a 4K picture in real time. During replay, any portion of the captured image can be cropped to provide a close-up HD HFR image. This gives directors a powerful editorial tool to enrich live sports coverage with detailed analysis of the action.



Optional Accessories



OTM-10GSR1
SFP+ Transceiver Module



SKC-MEM4
Internal Memory Array



J-712-156-0A
Camera Test Charts



HDLA-1500/1505/1507
Large Lens Adaptor



Adapter Plate

To incorporate a lens support when mounting a longer, heavier lens, you can attach the Vocas BP-18 19 mm Balance Plate to the HDC-4800 by fixing the Vocas Adapter Plate (item code: 0490-0030) under the camera.


Upgrade Software

SZC-4008 Support Software for 4K HFR
SZC-4008M Support Software for 4K HFR (30-day limited period)
SZC-4008W Support Software for 4K HFR (7-day limited period)

SZC-2016 Support Software for HD HFR
SZC-2016M Support Software for HD HFR (30-day limited period)
SZC-2016W Support Software for HD HFR (7-day limited period)

System Configuration Examples

HDC-4800 connection example

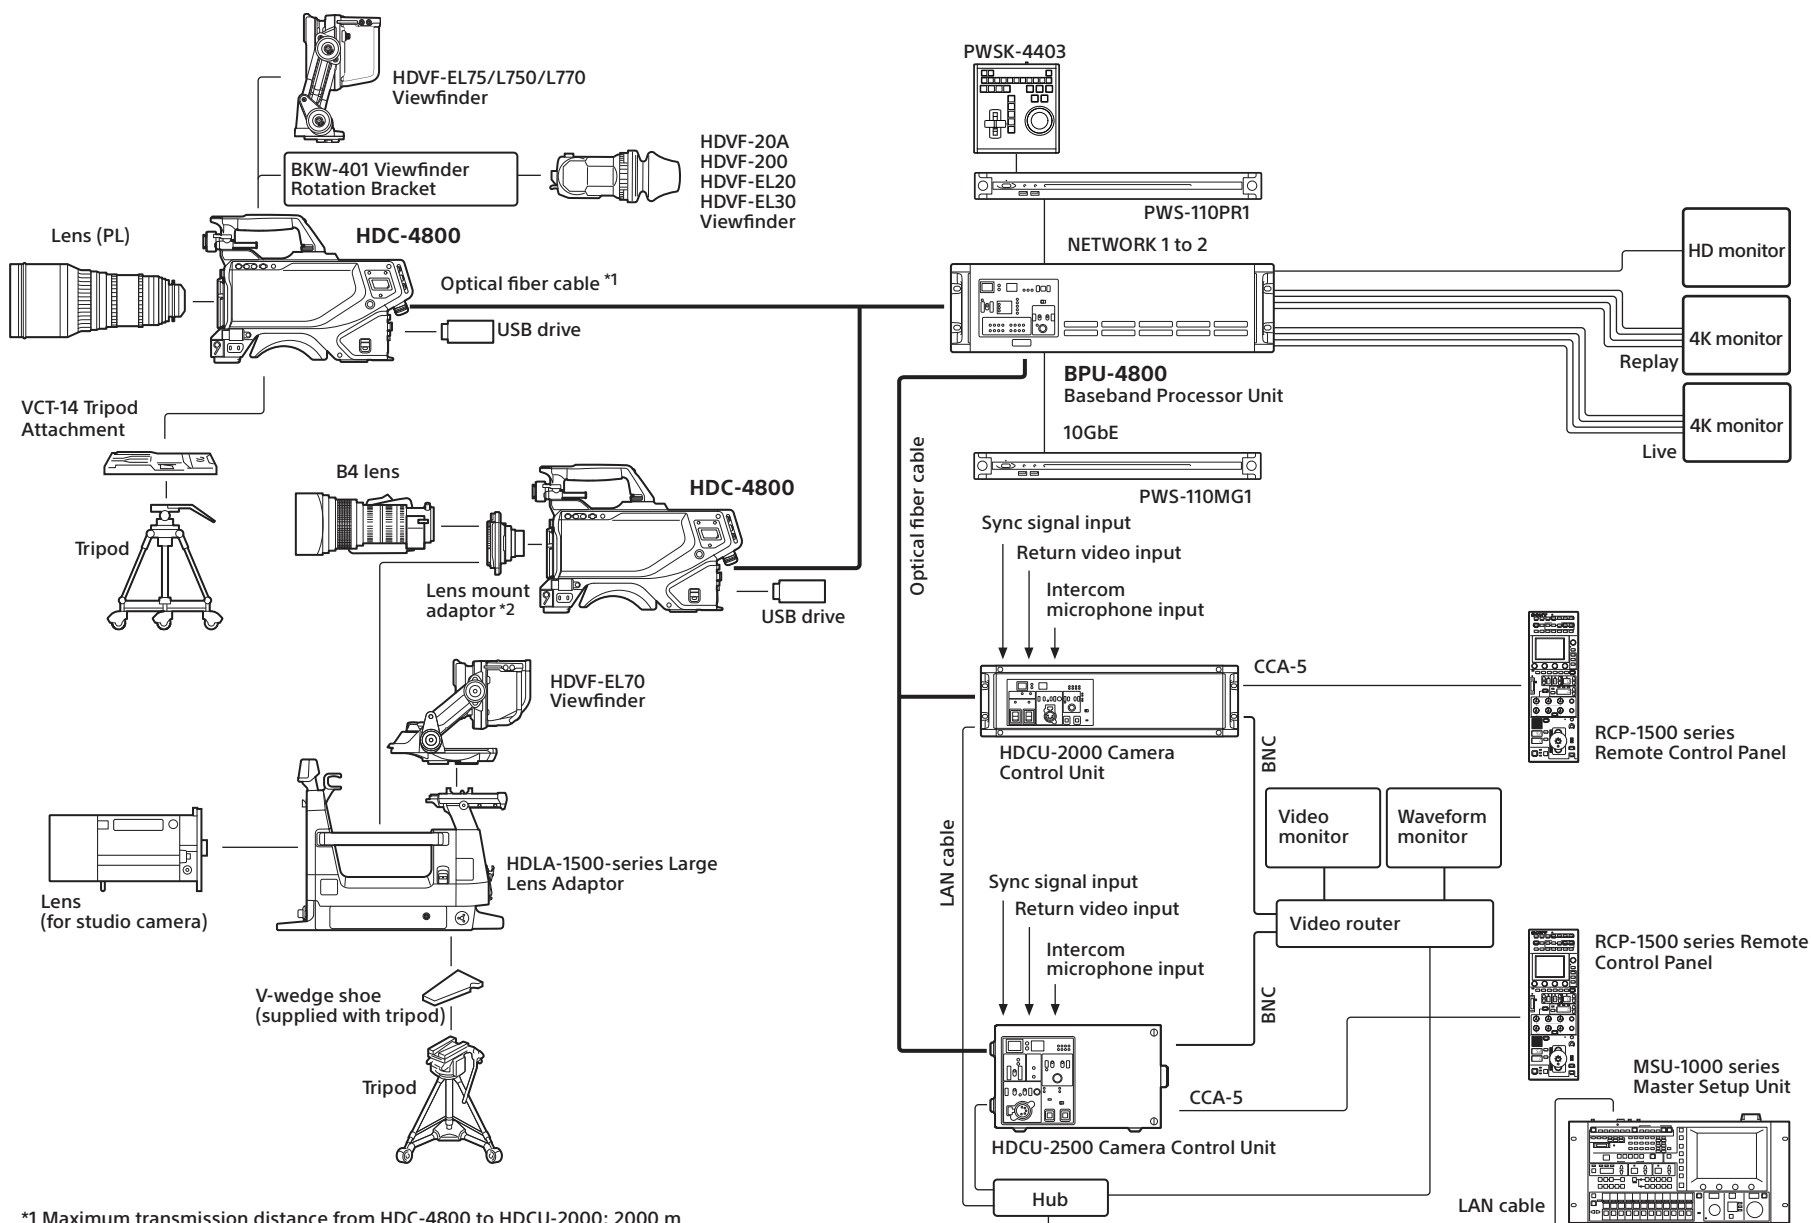


*1 Maximum transmission distance from HDC-4800 to HDCU-2000: 2000 m

*2 When operating in HD format at 8x/16x speed.

Specifications

Extension mode connection example

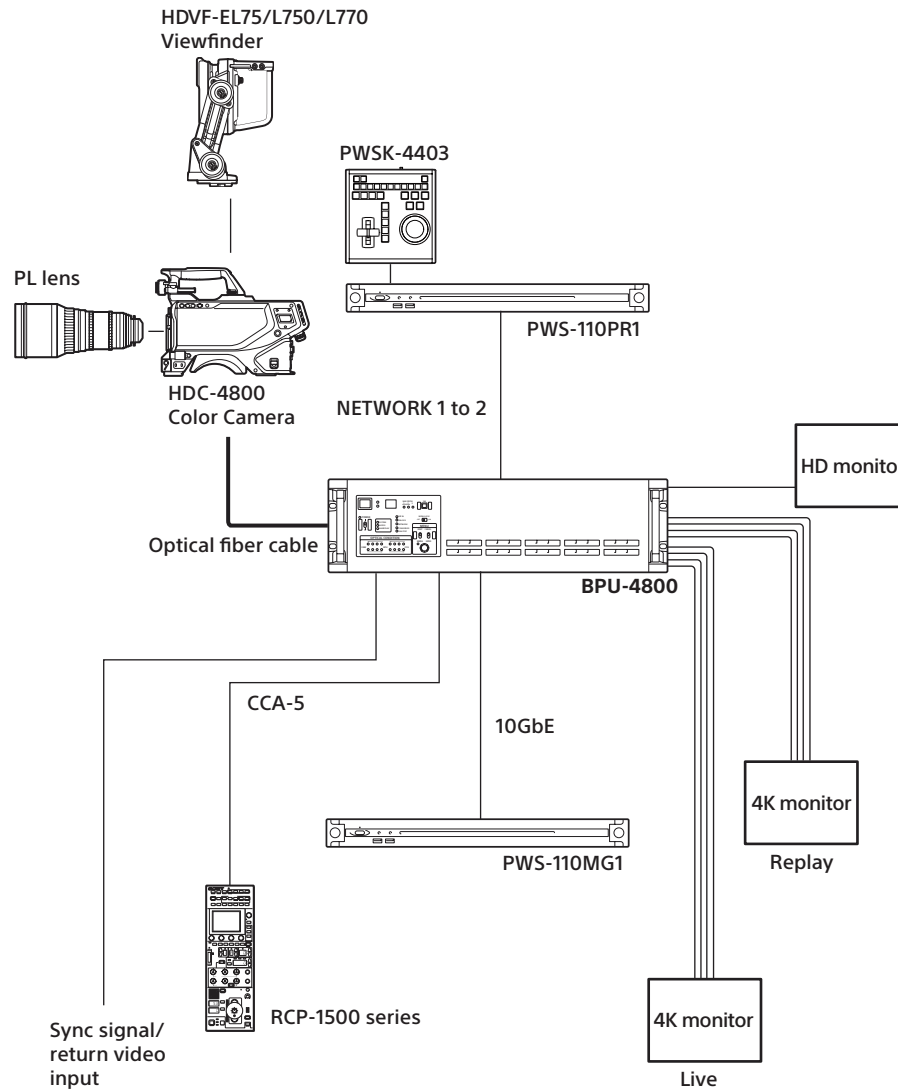


HDC-4800	
General	
Power requirements	240 V AC, 1.4 A (max.), 180 V DC, 1.0 A (max.), 12 V DC, 9.5 A (max.)
Operating temperature	-20 °C to +45 °C (-4 °F to +113 °F)
Storage temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Mass	Approx. 5.0 kg (11 lb 0.37 oz) (Unit only)
Imaging element	
Imaging element	S-35 mm CMOS image sensor
Method	Single chip
Effective resolution	QFHD: 3840 (horizontal) × 2160 (vertical) HD: 1920 (horizontal) × 1080 (vertical)
Electrical characteristics	
Sensitivity	T5.6 (at 2000 lx with 89.9% reflectance. For 4K/59.94P (8×))
Image S/N	HD/59.94i: -62 dB
Horizontal resolution	2000 TVL (4K: screen centered) 5% or higher modulation
Geometric distortion	Negligible (not including lens distortion)
Optical system specifications	
Built-in filters	Color temperature conversion filters
	A: 3200K (clear), B: 4300K, C: 6300K
ND filters	
1: Clear, 2: 1/4 ND, 3: 1/16 ND	
Input/output connectors	
BPU	Optical/electrical multi-connector (LEMO 3K.93C connector) (x1)
LENS	12-pin (x1)
VF	20-pin (x1)
AUDIO IN CH1, CH2	XLR 3-pin, female (1 each) When AUDIO switch is set to MIC: -60 dBu (can be selected up to -20 dBu by menu or HDCU2000/2500 operations), balanced When AUDIO switch is set to LINE: 0 dBu, balanced
INTERCOM 1, INTERCOM 2	XLR 5-pin, female (1 each)
EARPHONE	Stereo minijack (x1)
DC IN	XLR 4-pin (x1), 10.5 V to 17 V DC
DC OUT	4-pin (x1), 10.5 V to 17 V DC, max. 0.5 A (This may be limited by the imposed load or inputs.) 2-pin (x1), 10.5 V to 17 V DC, max. 2.5 A (This may be limited by the imposed load or inputs.)
SDI 1, SDI 2	BNC (x1 each)
SDI-MONI	BNC (x1)
TEST OUT	BNC (x1)
PROMPTER	BNC (x1), 1 Vp-p, 75 Ω
PROMPTER2	BNC (x1), 1 Vp-p, 75 Ω
RET CTRL	6-pin (x1)
REMOTE	8-pin (x1)
TRACKER	10-pin (x1)
CRANE	12-pin (x1)
USB USB 2.0	Type A 4-pin (x1) (for connecting USB drive)
NETWORK TRUNK	RJ-45 type 8-pin (x1)
Supplied accessories	
Before Using this Unit (1 set), Operating Instructions (CD-ROM) (1), Lens mount adaptor (1), Cable clamp belt (1 set), Camera number label (1), Screws (+B3×8) (2)	

BPU-4800	
General	
Power requirement	100 V to 127 V/200 V to 240 V AC, 50/60 Hz
Current consumption	4.5 A (max)
Operating temperature	5 °C to 40 °C (41 °F to 104 °F)
Storage temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Mass Approx.	16.5 kg [36 lb 6.0 oz]
Dimensions (W x H x D)	424 x 132 x 410 mm (16 3/4 x 5 1/4 x 16 1/4 inches)

Input/output connectors	
CAMERA	Optical/electrical multi-connector (LEMO 3K.93C connector) (x1)
CCU	Optical/electrical multi-connector (LEMO 3K.93C connector) (x1)
REMOTE (RCP/CNU)	8-pin multi-connector (x1)
LAN	8-pin (x1)
SHARE PLAY	1/2 SPF+ (x2)
REMOTE1/2	RJ-45 (x1)
GPIO (25P)	25-pin D-Sub, female (x1)
NETWORK1 to 2	RJ-45 (x2), 1000BASE-T
MAINTENANCE	USB (x1)
NETWORK	SFP+ (x1), 10GBASE-SR/LR (Add-in Card)
Input connectors	
AC IN	100 V to 127 V/200 V to 240 V AC (x2)
SDI1, SDI2	BNC (x2), 3G-SDI: SMPTE ST424/425 Level-A/B, 2.970 Gbps/2.967 Gbps HD-SDI: SMPTE ST292, 0.8 Vp-p, 75 Ω, 1.485 Gbps/1.4835 Gbps
REFERENCE IN	BNC (x1) HD: SMPTE ST274, tri-level sync, 0.6 Vp-p, 75 Ω SD: Black burst (NTSC: 0.286 Vp-p, 75 Ω, PAL: 0.3 Vp-p, 75 Ω)
TIMECODE INPUT	BNC (x1), 0.5 Vp-p to 5 Vp-p, 10 kΩ
DIGITAL AUDIO (AES/EBU) INPUT	BNC (x4), CH 1/2 to CH 7/8, AES/EBU format, unbalanced Note: When connecting devices for AES/EBU signal input/output, use a cable whose length is less than 300 meters (984 feet).
Output connectors	
3G SDI OUTPUT (SLOT1 LIVE)	BNC (x8) 3G-SDI: SMPTE ST424/425 Level-A/B, 0.8 Vp-p, 75 Ω, 2.970 Gbps/2.967 Gbps
3G/HD SDI OUTPUT (SLOT1 REPLAY)	BNC (x8) 3G-SDI: SMPTE ST424/425 Level-A/B, 0.8 Vp-p, 75 Ω, 2.970 Gbps/2.967 Gbps HD-SDI: SMPTE ST292, 0.8 Vp-p, 75 Ω, 1.485 Gbps/1.4835 Gbps 3G-SDI/HD-SDI selectable
3G/HD SDI OUTPUT (SLOT2 LIVE)	BNC (x2) 3G-SDI: SMPTE ST424/425 Level-A/B, 0.8 Vp-p, 75 Ω, 2.970 Gbps/2.967 Gbps HD-SDI: SMPTE ST292, 0.8 Vp-p, 75 Ω, 1.485 Gbps/1.4835 Gbps 3G-SDI/HD-SDI selectable
3G/HD SDI OUTPUT (SLOT2 REPLAY)	BNC (x2) 3G-SDI: SMPTE ST424/425 Level-A/B, 0.8 Vp-p, 75 Ω, 2.970 Gbps/2.967 Gbps HD-SDI: SMPTE ST292, 0.8 Vp-p, 75 Ω, 1.485 Gbps/1.4835 Gbps, 3G-SDI/HD-SDI selectable
HD SDI OUTPUT (SLOT3 LIVE)	BNC (x1) HD-SDI: SMPTE ST292, 0.8 Vp-p, 75 Ω, 1.485 Gbps/1.4835 Gbps
HD SDI OUTPUT (SLOT3 REPLAY)	BNC (x1) HD-SDI: SMPTE ST292, 0.8 Vp-p, 75 Ω, 1.485 Gbps/1.4835 Gbps
REFERENCE OUT	BNC (x1) HD: SMPTE ST274, tri-level sync, 0.6 Vp-p, 75 Ω SD: Composite sync, 0.3 Vp-p, 75 Ω, HD SYNC/SD SYNC selectable
NMI-LAN (SLOT1 LIVE)	SFP+ (x2), 10G BASE-** (using SFP+ transceiver module)
NMI-LAN (SLOT1 REPLAY)	
NMI-LAN (SLOT2)	
TIMECODE OUTPUT	BNC (x1), 1.5 Vp-p, low impedance
DIGITAL AUDIO (AES/EBU) OUTPUT	BNC (x4), CH 1/2 to CH 7/8, AES/EBU format, unbalanced
Supplied accessories	
Number plates (1 set), Before Using this Unit (1), Operating Instructions (CD-ROM) (1), Cable, RJ45-DSUB, Part No. 1-848-424-12 (SONY) (1)	

Dimensions

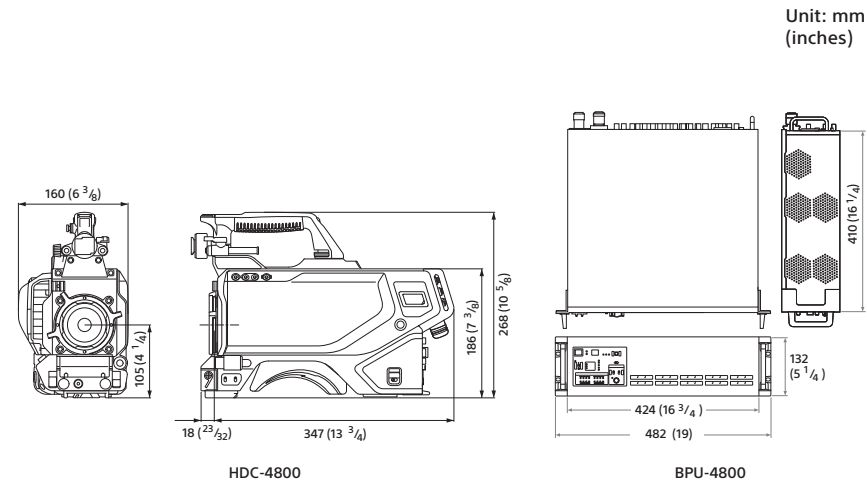

4K Baseband Processor BPU-4800

Rear



SONY

Distributed by

©2017 Sony Corporation. All rights reserved.
Reproduction in whole or in part without written permission is prohibited.
Features, design, and specifications are subject to change without notice.
The values for mass and dimension are approximate.
"SONY" is a registered trademark of Sony Corporation.
All other trademarks are the property of their respective owners.